American Standard

Style That Works Better

# MONTERREY<sup>™</sup> 0.5 GPM TWO-HANDLE CENTERSET LAVATORY FAUCET WITH CONVENTIONAL SPOUT



5501.175 Shown

## MODEL NUMBER:\*

#### 5500.175 Centerset Lavatory

0.5 gpm Pressure Compensating Vandal-Resistant Spray. Vandal-Resistant Wrist Blade handles. Less drain and pop-up hole.

#### **5501.175 Centerset Lavatory**

0.5 gpm Pressure Compensating Vandal-Resistant Spray. Vandal-Resistant Wrist Blade handles. Pop-up drain.

#### 5502.175 Centerset Lavatory

0.5 gpm Pressure Compensating Vandal-Resistant Spray. Vandal-Resistant Wrist Blade handles. Grid strainer drain.

#### 5500.145 Centerset Lavatory


0.5 gpm Pressure Compensating Vandal-Resistant Spray. Vandal-Resistant Lever handles. Less drain and pop-up hole.

#### 5501.145 Centerset Lavatory

0.5 gpm Pressure Compensating Vandal-Resistant Spray. Vandal-Resistant Lever handles. Pop-up drain.

#### 5502.145 Centerset Lavatory

0.5 gpm Pressure Compensating Vandal-Resistant Spray. Vandal-Resistant Lever handles. Grid strainer drain.

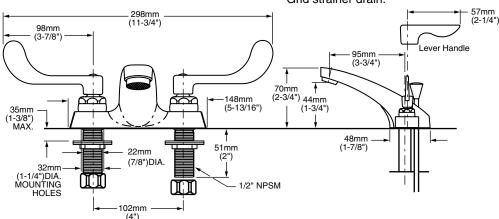

## **GENERAL DESCRIPTION:**

Durable cast brass construction throughout. 1/2" male threaded inlet shanks with brass shank nuts and coupling nuts. 1/4 turn ceramic disc valve cartridges. Choice of Vandal-Resistant Wrist Blade or Lever handles with blue & red color indexes. All brass drain bodies with 1 1/4" (32mm) tailpieces (on applicable models). 0.5 gpm/1.9L/min. maximum flow rate.

## **PRODUCT FEATURES:**

**Pressure Compensating Spray:** Provides a constant water flow of 0.5 gpm throughout the pressure range

**Solid Brass Construction:** Durable - Excellent in high use applications. Ideal for prolonged contact with water.

**Ceramic Disc Valve Cartridges:** Assures a lifetime of drip-free performance.

**Low Lead:** Faucet contains 0.25% total lead content by weighted average.

## SUGGESTED SPECIFICATION:

4" centerset lavatory faucet shall be cast brass construction with all brass shank nuts and coupling nuts. Shall feature water-conserving vandal-resistant 0.5 gpm/1.9L/min. pressure compensating spray. Vandal-Resistant handles. Shall also feature 1/4 turn washerless ceramic disc valve cartridges. Fitting shall be American Standard Model # 550\_.1\_5.002.




Style That Works Better

## MONTERREY<sup>™</sup> 0.5 GPM **TWO-HANDLE CENTERSET LAVATORY FAUCET** WITH CONVENTIONAL SPOUT

# **CODES AND STANDARDS**

These products meet or exceed the following codes and standards:

**ANSI A117.1** ASME A112.18.1 **CSA B 125** NSF 61/Section 9 and Annex G



		Finish
Product		Polished Chrome
Number	Description	002
5500.175	Centerset Lavatory. 0.5 gpm/1.9L/min pressure compensating vandal-resistant spray. Vandal-Resistant Wrist Blade Handles. Less drain and pop-up hole.	
5501.175	Centerset Lavatory. 0.5 gpm/1.9L/min pressure compensating vandal-resistant spray. Vandal-Resistant Wrist Blade Handles. Pop-up drain.	
5502.175	Centerset Lavatory. 0.5 gpm/1.9L/min pressure compensating vandal-resistant spray. Vandal-Resistant Wrist Blade Handles. Grid strainer drain.	
5500.145	Centerset Lavatory. 0.5 gpm/1.9L/min pressure compensating vandal-resistant spray. Vandal-Resistant Lever Handles. Less drain and pop-up hole.	
5501.145	Centerset Lavatory. 0.5 gpm/1.9L/min pressure compensating vandal-resistant spray. Vandal-Resistant Lever Handles. Pop-up drain.	
5502.145	Centerset Lavatory. 0.5 gpm/1.9L/min pressure compensating vandal-resistant spray. Vandal-Resistant Lever Handles. Grid strainer drain.	

MEETS THE AMERICANS WITH DISABILITIES ACT GUIDELINES AND ANSI A117.1 REQUIREMENTS FOR ACCESSIBLE AND USABLE BUILDING FACILITIES-CHECK LOCAL CODES