# **RESTORATION 3** – RESTORATION SERIES

54 3/8 x 30 x 24 1/2 (1370 x 760 x 650) • Fax on Demand #1328

### SOAKER MODEL #AIY5417TO



## AQUATIC ADVANTAGE

- National distribution
- 6 manufacturing facilities
- Private fleet
- Centralized customer service
- Field support
- 24-hour fax-on-demand





## **FEATURES**

- Deep bathing well
- Claw feet: Chrome, Oil-Rubbed Bronze, Polished Brass, Brushed Nickel, White
- Slip-resistant floor
- End drain
- Lucite cast acrylic surface
- Available in white only
- Limited lifetime warranty

# **OPTIONS**

- Comfort pillow: Biscuit, Black, White
- Freestanding waste & overflow: Chrome, Oil Rubbed Bronze, Polished Brass, Brushed Nickel, White

### Restoration Series • Fax on Demand #1328


# **RESTORATION 3**

54 3/8 × 30 × 24 1/2 (1370 × 760 × 650) inches (mm)

**TECHNICAL SPECIFICATIONS** 





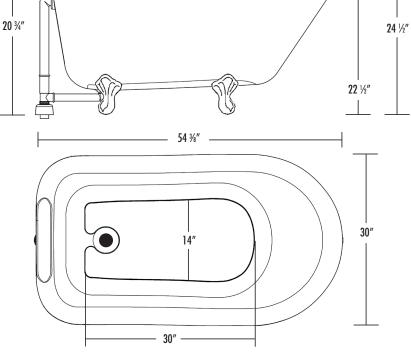

FEATURES Ibs (kg) Dimensional Tolerance ± 3/8". Dimensions needed for site preparation should be measured from the unit. Aquatic assumes no responsibility for preparatory work.

Type and Model #	Material	Drain	Pkg. Wt.
Soaker #AIY5417TO	Acrylic	End	110 (50)


DIMENSIONS inches (mm)				S	5U/
<b>Width</b> Overall / Net	<b>Depth</b> Overall / Net	<b>Height</b> Overall / Net	Skirt Height		Ca C
54 ¾ (1370)	30 (760)	24 ½ (650)	-	_	4

#### MP DATA inches (mm)

Capacity to Overflow	Min. Operating Capacity	WIDTH @ centerline		DEPTH @ centerline	
gal (ltr)	gal (ltr)	Тор	Bottom	Тор	Bottom
41 (155)	-	48 ¾ (1240)	36 ¾ (930)	24 (610)	20 ½ (520)

### PLUMBING DIMENSIONS inches (mm)

А	В
1 7⁄8 (50)	12 ¼ (310)



NOTES: 1) Where applicable, utilize cut-out templates packed with unit for deck cutouts.

2) 16 x 20 (405 x 510) minimum access required at pump/blower location(s).

