

36ACTRIB – ACRYLIC SHOWERS

inches (mm)

36 x 36 x 84 (915 x 915 x 2135) • Fax on Demand #3019

STANDARD MODEL #36ACTRIB

STEAM MODEL #S36ACTRIB



FEATURES

- Smooth wall finish
- 3-piece
- Molded toiletry shelves
- Slip-resistant floor
- Centerdrain
- Lucite cast acrylic surface
- Limited 5-year warranty
- Steam System (S36ACTRIB)
- Pre-plumbed steam generator
- Steam outlet: Chrome
- Steam door: Chrome w/ Clear or Obscure glass
- Electronic control
- Aromatherapy
- Dome light
- Brass drain with stainless steel cover
- East zone only

AQUATIC ADVANTAGE

- National distribution
- 5 manufacturing facilities
- Private fleet
- Centralized customer service
- Field support
- 24-hour fax-on-demand

COLOR & TRIM OPTIONS

Stock	Premium
Almond	Black
Bone	Cashmere
Linen/Biscuit	Mexican Sand
Sterling Silver	Red
White	Sandbar

OPTIONS

- Brass drain (standard on steam models)
- Dome light (standard on steam models)
- Shower door series: L533



36ACTRIB



36 x 36 x 84 (915 x 915 x 2135)
inches (mm)




Electrical Requirements:

Generator - 230V, 30AMP, GFCI

Dome Light - 120V, 10AMP, GFCI

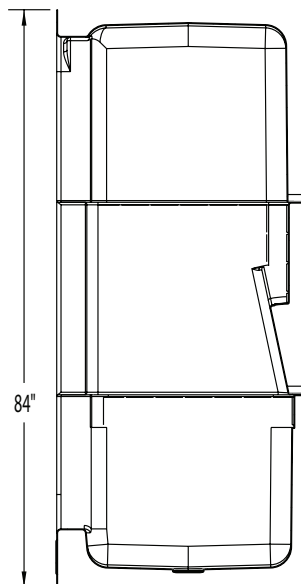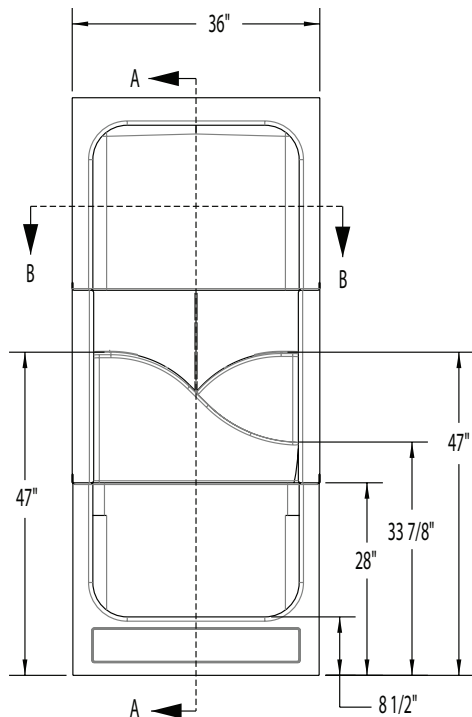

SECTION A-A

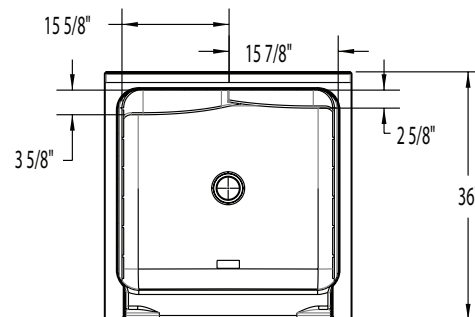

SECTION B-B

FEATURES lbs (kg) Dimensional Tolerance $\pm 3/8"$. Dimensions needed for site preparation should be measured from the unit. Aquatic assumes no responsibility for preparatory work.


Type and Model #	Material	Wall Finish	Pieces	Drain	Seats	Lights	Pkg. Wt.
Shower #36ACTRIB	Acrylic	Smooth	3	Center	-	Optional	154 (70)
Steam Shower #S36ACTRIB	Acrylic	Smooth	3	Center	-	6" Recessed	174 (79)

DIMENSIONS

Specifications	inches (mm)
Width: Overall / Net	36 (915)
Depth: Overall / Net	36 (915) / 36 (915)
Height: Overall / Net	84 (2135)
Enclosure Opening	30 (760)W x 71 1/2 (1815)H
Skirt Height	8 1/2 (215)
Drain Rough-In (from Back Wall)	17 3/8 (440)
Drain Rough-In (from Side Wall)	18 (455)
Drain: Diameter / Clearance	3 1/2 (90) / 2 1 1/16

FRAMING DIMENSIONS inches (mm)

Type	D Depth	W Width	H Height	A Box-Out	B	C
Alcove	37 (940)	36 1/8 (920)	-	6 x 6 (150 x 150)	18 (455)	17 3/8 (440)

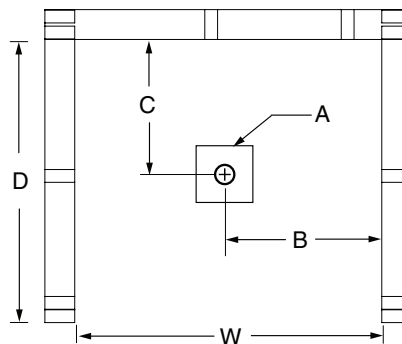

*Refer to installation instructions for further detail. (domed models)