



# SHOWERHEAD

- Temp20™ temperature display showerhead
- 6-spray setting showerhead
- Touch-Clean® nozzles
- Temperature display changes color as temperature increases

### STANDARD SPECIFICATIONS:

- Standard 1/2" NPT thread.
- No batteries required.
- Easy turn spray lever for simple spray selection.
- Metal ball connector for durability. Easy installation.
- Maximum flow rate 2.0 gpm (7.6L/min) @ 80 PSI.



### WARRANTY

- Lifetime limited warranty on parts (other than electronic parts and batteries) and finishes; or, for commercial users, for 5 years from the date of purchase.
- 5 year limited warranty on electronic parts (other than batteries); or for commercial users, for 1 year from the date of purchase. No warranty is provided on batteries



### COMPLIES WITH

- ASME A112.18.1 / CSA B125.1

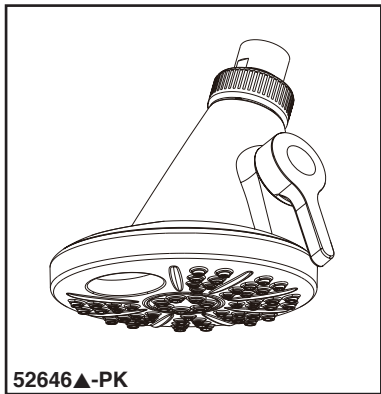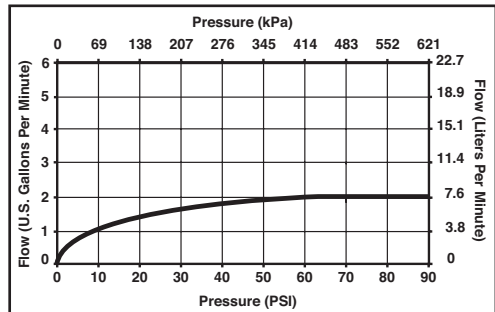

52646▲-PK

Submitted Model No.: \_\_\_\_\_

Specific Features: \_\_\_\_\_

52646▲-PK

Dimensions:  
 Height: 5 1/4" (133 mm)  
 Width: 4 3/4" (120 mm)

- Full Body Spray
- Massage Spray
- Full Spray w/ Massage
- Shampoo Rinse Spray
- Shampoo Rinse w/ Massage
- Drenching Spray

### ▲ Designate proper finish suffix

Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or [www.deltafaucet.com](http://www.deltafaucet.com) for finish options and product availability.

