

# Little GIANT<sup>®</sup>

## 1-42 SERIES



### Features


- For submersed or in-line use
- Epoxy coated die-cast aluminum housing
- Oil-filled motor
- 7.4' maximum lift
- 70 watts
- 1/4" MNPT discharge
- Thermal overload protection

### Construction

- Motor — 1/150 HP oil-filled
- Maximum Flow Rate — 205 GPH @ 1'
- Maximum Head — 7.4'
- Intermittent Liquid Temp. up to — 120°F
- Intake — 1/2" MNPT & 1/4" FNPT
- Discharge — 1/4" MNPT
- Housing — Epoxy coated cast aluminum
- Cover — Epoxy coated cast aluminum
- Volute — Nylon
- Impeller — Nylon
- Shaft Seal — Nitrile


Dual purpose oil-filled pump that may be used totally submersed or in-line (fed with pipe or hose). For commercial, industrial and home applications including statuary fountains, water displays, air conditioners, machine tool coolants, and many other applications where liquid must be transferred or recirculated. This compact 205 GPH pump features a 1/4" MNPT discharge and 7.4' shut-off head capability.

# 1-42 SERIES

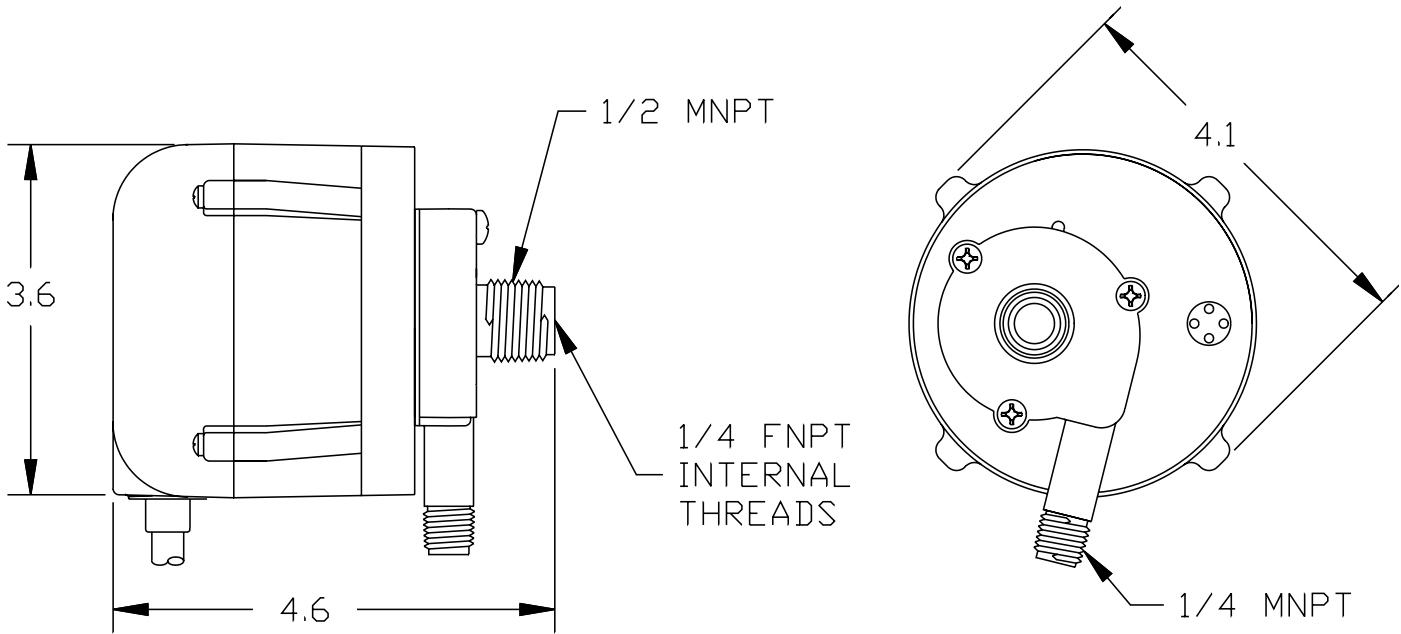

## Specifications

Model No.	Item No.	Discharge Size	Intake Size	Listing(s)	HP	Volts	Hertz	Amps	Watts	Performance (GPH@Head)			Shutoff		Cord Length (ft.)	Weight (lbs.)
										1'	3'	5'	Ft.	P.S.I.		
1-42	501203	1/4" MNPT	1/2" FNPT & 1/4" FNPT	UL	1/150	115	60	1.1	70	205	168	120	7.4	3.2	6	3.50

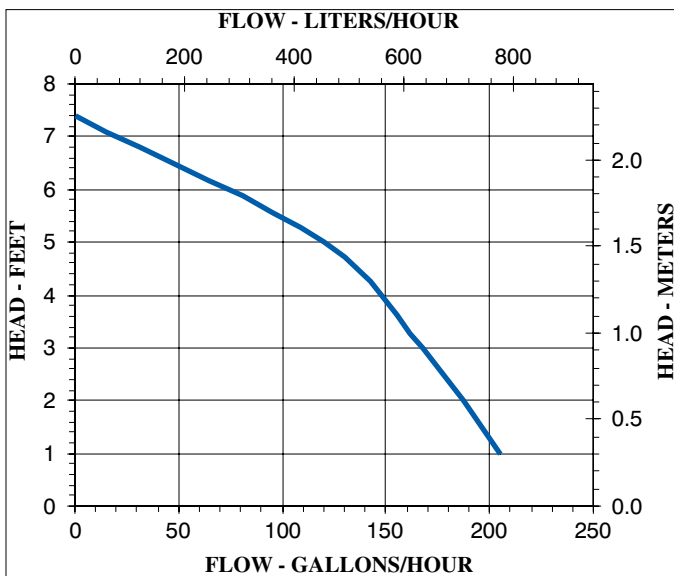

## Replacement Parts

Volute	101330
Impeller	101442
Gasket	131009