Swirl-way® Rectangular Whirlpool or Bathtub



Bathtub and Whirlpool Features .

- 66" x 36" x 19-3/4" rectangular bathtub
- Sculpted armrests and lumbar backrest
- One pillow
- Two decorative handles
- Mansfield® Limited Ten Year Warranty
- Available in standard colors (white, almond, biscuit and bone)
 and premium colors (British khaki, sterling silver, black and ice gray)

Basic Whirlpool Features

- Hydro-V back jet system
- Single speed pump
- 1-button electronic keypad
- Color match trim
- Dual air controls

Luxury Whirlpool Features

- Hydro-V back jet system
- Variable speed pump
- 5-button electronic keypad with digital temperature readout
- Metal trim upgrades
- Chromotherapy system
- In-line heater



Model 5028LUX

Options .

Cable Drain

Lift and Turn Drain

Model #	Description		Model #	Description	
SW1319	Standard Colors		PF1320	Polished Chrome	044
SW1320	Polished Chrome		PF1321	Everbrass (PVD)	
SW1321	Everbrass (PVD)		PF1322	Brushed Nickel	
SW1322	Brushed Nickel		PF1323	Oil Rubbed Bronze	
SW1323	Oil Rubbed Bronze		SW1327	5-1/2 foot Removable	
SWA200	Custom Pillow			Apron	
SWP150	Factory Installed Nailing Flange	3	SWAP00	Nailing Flange Kit	Manispeld

Whirlpool Options.

Metal Trim

Model #	Description		Model #	Description	
SW1335	Chrome	000			
SW1336	Everbrass (PVD)		CWD1E1	In line water beater	The second secon
SW1337	Brushed Nickel		SWP151	In-line water heater	The second
SW1338	Oil Rubbed Bronze				






Specifications

Model #	Description	Codes/Standards
5528	66" X 36" X 19-3/4" Rectangular Bath	
5028BAS	66" X 36" X 19-3/4" Basic Whirlpool Package	U P C USPC W
5028LUX	66" X 36" X 19-3/4" Luxury Whirlpool Package	○ ○ ○ Intertek

Specification Description		Specification	Description	
Material	Acrylic, fiberglass reinforced	Number of Jets	12	
Construction	Self-contained, pre-plumbed whirlpool bath, mounted on a pre-leveled base	Water Capacity	40 gal. (min.) / 60 gal. (max.)	
Pump Motor	Basic: 1.5 HP Single speed induction pump Luxury: 1.5 HP Variable speed induction pump	Floor Loading Weight	47 lbs. / sq. ft. (229 kg/m ²)	
Electrical Requirements	Basic: One 120V, 20 Amp, GFCI dedicated circuit. Optional heater: separate 120V, 20 Amp, GFCI dedicated circuit. Luxury: Two separate 120V, 20 Amp, GFCI dedicated circuits.	Shipping Weight	whirlpool - 165 lbs. bathtub - 120 lbs.	
On/Off Control	Basic: 1-button electronic control pad Luxury: 5-button electronic control pad with digital readout showing temperature of water, speed of pump and time remaining in 20-minute cycle.	Warranty	Limited Ten Year	

Technical Information

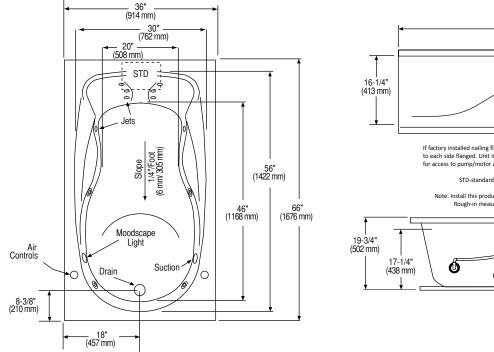

If factory installed nailing flange is added to a unit, add 1/8" (3 mm) to each side flanged. Unit is available with optional removable apron for access to pump/motor and plumbing on whiripool baths.

STD-standard pump location is as shown.

Note: Install this product according to the installation guide. Rough-in measurements may vary 1/4" (+/-).

These dimensions are nominal and subject to change without notice.

When tested for compliance to the requirements of ASME A112.19.7M for "Whirlpool Bath Appliances" and ANSI Z124.1.2M "American National Standard for Plastic Bathtub and Shower Units", the tested units are found to comply and are acceptable for listing under IAPMO R & T.

Certified for permanent electrical connection only.

