

# ENGINEERING EXCELLENCE

#### **Brentwood Series** #4BR100T

## SPECIFICATION SHEET

### **DESCRIPTION**

- Single Handle Tub and Shower Trim Set
- Metal Lever Handle
- Ceramic Disc Cartridge with Temperature Limit Stop
- Dual Function 2-1/2" Diameter Showerhead
- Shower Arm and Flange
- Combo 1/2" IPS/ Slip-On Diverter Tub Spout
- Tub Spout Escutcheon
- Color Match Sleeve and Retaining Ring

### STANDARDS APPLICABLE

- ASME A112.18.1
- ANSI A117.1

#4020B

CUPC / IAPMO LISTED / ADA **COMPLIANT** 

## **FINISHES**

- PC PVD Polished Chrome
- **PVD Brushed Nickel** BN
- PN **PVD Polished Nickel**
- PB **PVD Polished Brass**
- ORB Oil Rubbed Bronze



#4BR100T SHOWN \* ADA



#### **FLOW**

Single Handle Tub and Shower-Valve Set

Showerhead Limited to 2.5 **GPM** 

Model #:	

Specific Features:

Project Name:

Submitted For:

□ N/A

Model	Description		Finishes	
#4BR100T	Single Handle Tub and Shower Trim Set		□ PC	□ Other
#4BR400T	Single Handle Valve Trim Set		□ PC	□ Other
Required Valve				




ENGINEERING EXCELLENCE

Pioneer:1-800-338-9468 Commerce, CA 90040 www.pioneerind.com Pioneer Industries, Inc. © 2013 DMSP4BR100T/REV. 12 2012 Page 1 of 2

### **Installation Note:**

Please refer to Installation Guide For this Product. Also Please refer to Installation Guide For the Rough-in Valve. Avoid Cross Flow Connections. Do not install a Shut off valve to any of the outlets. Install a 305 MM [12"] Straight Pipe with single elbow for bath between the rough-in valve and the tub spout.

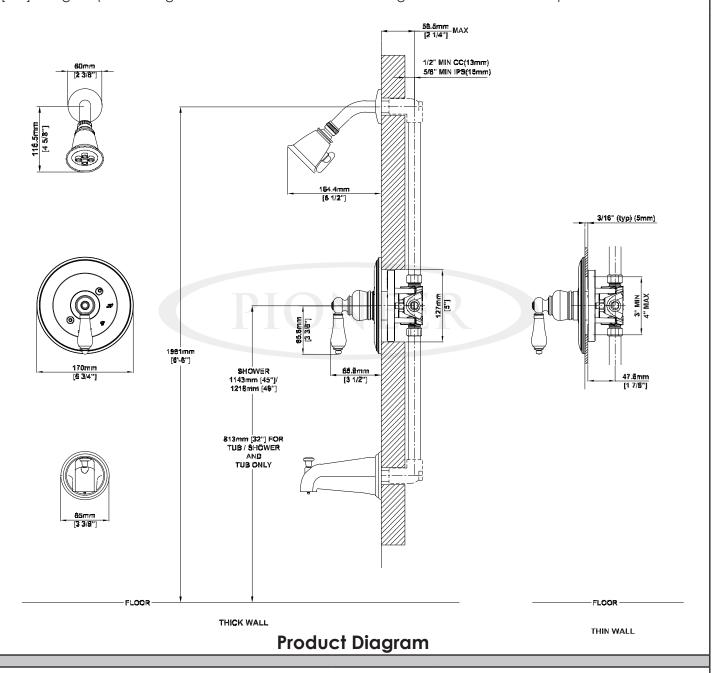



DMSP4BR100T/REV. 12 2012 Page 2 of 2

Pioneer:1-800-338-9468 Commerce, CA 90040 www.pioneerind.com Pioneer Industries, Inc. © 2013