

**Tub & Shower System with hand shower** 4206 Specification Submittal

# **Feature Highlights**

- Symmons tub and shower system with lever handles.
- Symmons Temptrol<sup>®</sup> pressure balancing mixing valve with adjustable stop screw to limit handle turn.
- Separate triple outlet lever diverter valve
- Wall/hand shower with 5 foot flexible metal hose, in-line vacuum breaker, wall connection and cradle for hand shower mounting
- Shower head with mounting bracket
- Flow rate 2.5 gpm (9.5 L/min) for both shower head and hand shower
- Tub spout
- Metal construction with polished chrome finish

## **Model Numbers**

4206	Tub & Shower System with Symmons Temptrol <sup>®</sup> pressure balancing mixing valve p/n 4000-BODY and triple outlet diverter p/n 4-460E-BODY
4206-TRM	Trim only, valve and diverter must be ordered separately
4000-BODY	Symmons Temptrol <sup>®</sup> pressure balancing mixing valve without trim
4000-X-BODY	Symmons Temptrol <sup>®</sup> pressure balancing mixing valve without trim. Valve includes integral service stops to allow water shut- off for service.
4-460E-BODY	Symmons triple outlet diverter valve without trim

## **Finish Options**

Append appropriate -suffix to model number.

- □ STN Satin nickel finish
- □ ORB Oil rubbed bronze finish

# **Options / Modifications**

Append appropriate -suffix to model number.


- □ -IPS 1/2 inch female IPS connections on Symmons Temptrol<sup>®</sup> mixing valve
- -X Symmons Temptrol<sup>®</sup> pressure balancing mixing valve includes integral service stops to allow water shut-off for service, p/n 4000-X-BODY. (Option only applies when ordering model 4206 only.)


# **Standards / Certifications**

ASME A112.18.1-2005/CSA B125.1-05

## Warranty

- Limited Lifetime to the original end purchaser in consumer installations.
- 5 years for commercial installations



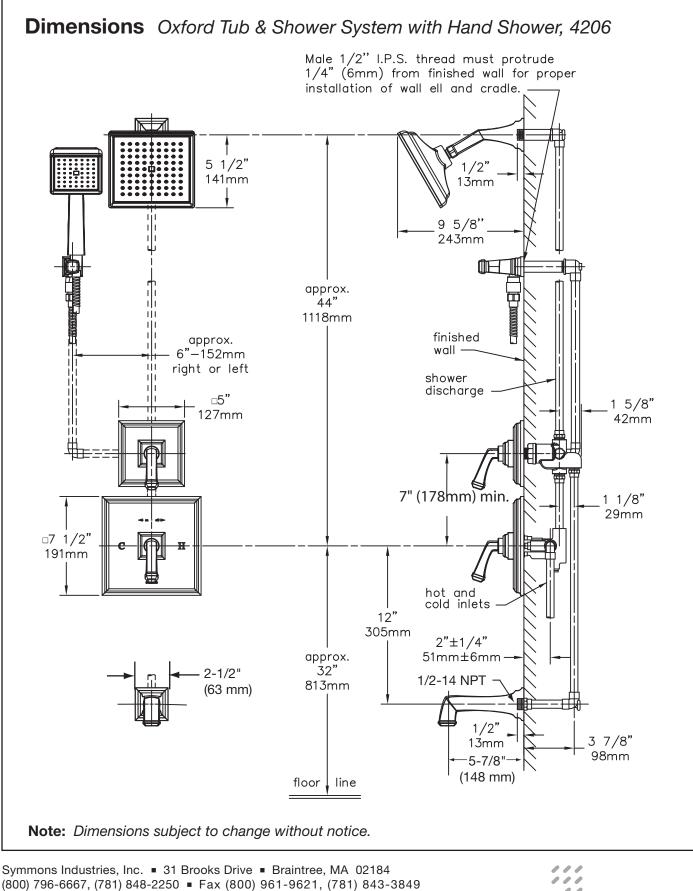

©2008 Symmons Industries, Inc. Printed in U.S.A. 
■ 061008

Website: www.symmons.com • Email: customerservice@symmons.com

