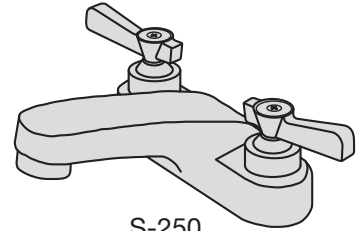


Location:




Symmetrix®

Lavatory Faucet S-250 Series Specification Submittal



S-250
Standard handle

Feature Highlights

- Cast brass 4 inch (102mm) centerset lavatory faucet
- Quarter turn ceramic control components with two blade handles
- 1/2 inch IPS shanks
- Solid brass construction
- Polished chrome finish (standard)
- Aerator with 2.2 gpm flow rate (8.3 L/min)
Optional aerator available in lower flow rates 

Standards / Certifications

ASME A112.18.1-2005/CSA B125.1-05





ADA compliant lever handles



Warranty

- Limited Lifetime - to the original end purchaser in residential / consumer installations
- 5 years - for commercial installations

S-250 series handle options

Standard	LWG		
 	 		

Model Numbers

Append appropriate -suffix to model number.

- S-250 Faucet only with lift rod hole
- S-250-0 Faucet only without lift rod hole
- S-250-1 Faucet with lift rod
- S-250-2 Faucet with pop-up drain & lift rod
- S-250-2-G Faucet with grid strainer drain assembly

Finish Options / Modifications

Append appropriate -suffix to model number.

- Polished chrome (standard)




Handle Options / Modifications

Append appropriate -suffix to model number.

- LWG Wrist blade handles

Other Options / Modifications

Append appropriate -suffix to model number.

- OFG Offset grid strainer (model S-250-2-G only)
-  -0.5 Aerator flow restrictor, 0.5 gpm (1.9 L/min)
-  -1.0 Aerator flow restrictor, 1.0 gpm (3.8 L/min)
-  -1.5 Aerator flow restrictor, 1.5 gpm (5.7 L/min)
- VP Vandal resistant aerator, 2.2 gpm (8.3 L/min)
- NA-1.0 Non-aerated laminar flow outlet, flow rate 1.0 gpm (3.8 L/min)
<PENDING TEST CERTIFICATION>

