

Tub and Hand Shower System S-5104 **Specification Submittal**

Feature Highlights

- Symmons tub and hand shower system with lever handles.
- Symmons Temptrol® pressure balancing mixing valve with adjustable stop screw to limit handle turn.
- Secondary integral volume control handle
- Wall/hand shower with 5 foot flexible metal hose, in-line vacuum breaker, wall connection and cradle for hand shower mounting
- Standard flow rate is 2.5 gpm (9.5 L/min)
- Tub spout
- Polished chrome finish

Model Numbers

S-5104	Tub and Hand Shower System with Symmons Temptrol® pressure balancing mixing valve p/n S-4002-BODY
S-5104-TRM	Trim only, valve and diverter must be ordered separately
S-4002-BODY	Symmons Temptrol® pressure balancing mixing valve without trim
S-4002-X-BODY	Symmons Temptrol® pressure balancing mixing valve without trim. Valve includes integral service stops to allow water

Finish Options / Modifications

Append appropriate -suffix to model number.

- STN Satin nickel
- ☐ -ORB Oil Rubbed Bronze
 - Polished chrome (standard finish)

shut-off for service.









Options / Modifications

Append appropriate -suffix to model number.


- ☐ -IPS 1/2 inch female IPS connections on Symmons Temptrol® mixing valve
- -X Symmons Temptrol® pressure balancing mixing valve includes integral service stops to allow water shut-off for service, p/n S-4002-X-BODY. (Option only applies when ordering model S-5104.)
- □ -2.0 2.0 (7.6 L/min) Flow rate restrictor
- ☐ -1.5 1.5 (5.7 L/min) Flow rate restrictor

Standards / Certifications

ASME A112.18.1-2005/CSA B125.1-05

Warranty

- Limited Lifetime to the original end purchaser in consumer installations.
- 5 years for commercial installations

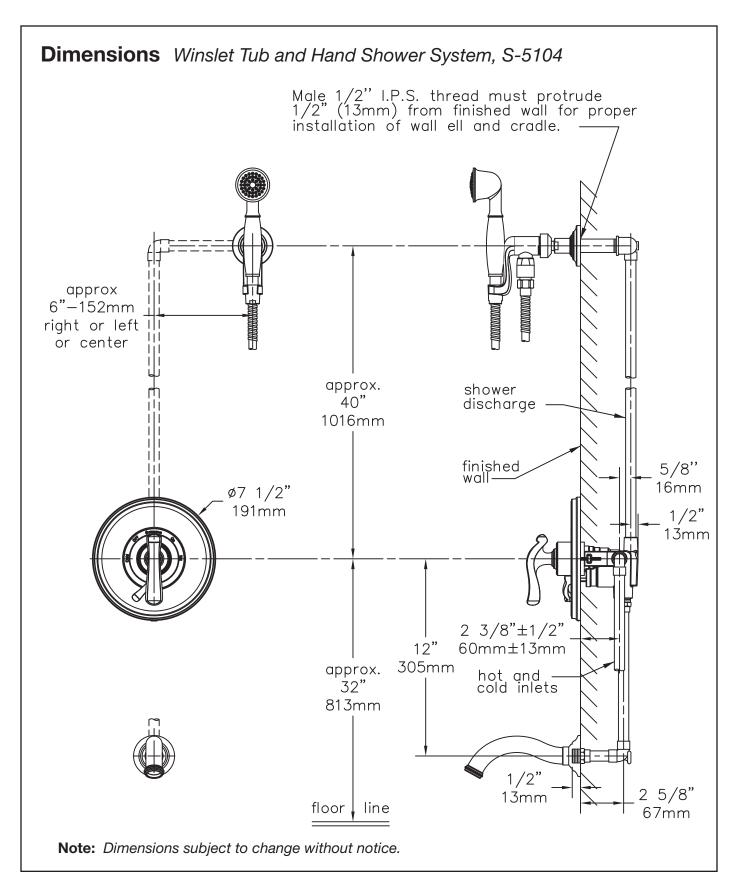

Symmons Industries, Inc. = 31 Brooks Drive = Braintree, MA 02184 (800) 796-6667, (781) 848-2250 = Fax (800) 961-9621, (781) 664-1300 Website: www.symmons.com = Email: customerservice@symmons.com

