

Location:




Sereno™

Shower System S-4301 Specification Submittal



Feature Highlights

- Symmons Shower System with lever handles
- Symmons Temptrol® pressure balancing mixing valve with adjustable stop screw to limit handle turn.
- Secondary integral volume control handle
- Shower head with arm and flange
- Stand flow rate is 2.5 gpm (9.5 L/min)
Optional lower flow rate restrictor available 
- Polished chrome finish

Model Numbers

- S-4301..... Shower System with Symmons Temptrol® pressure balancing mixing valve, p/n S-4001-BODY
- S-4301-TRM..... Trim only, valve must be ordered separately
- S-4001-BODY..... Symmons Temptrol® pressure balancing mixing valve without trim
- S-4001-X-BODY...Symmons Temptrol® pressure balancing mixing valve without trim. Valve includes integral service stops to allow water shut-off for service



Finish Options / Modifications

Append appropriate -suffix to model number

- STN Satin nickel
- Polished chrome (standard finish)

Options / Modifications

Append appropriate -suffix to model number

- IPS 1/2 inch female IPS connections on Symmons Temptrol® mixing valve
- X Integral service stops included in Temptrol® mixing valve to allow water shut-off for service, p/n S-4001-X-BODY (option only applies when ordering model S-4301)
-  -2.0 2.0 (7.6 L/min) Flow rate restrictor
-  -1.5 1.5 (5.7 L/min) Flow rate restrictor


Standards / Certifications

ASME A112.18.1-2005/CSA B125.1-05

Warranty

- Limited Lifetime - to the original end purchaser in consumer installations
- 5 years - for commercial installations

Dimensions *Sereno Shower System, S-4301*

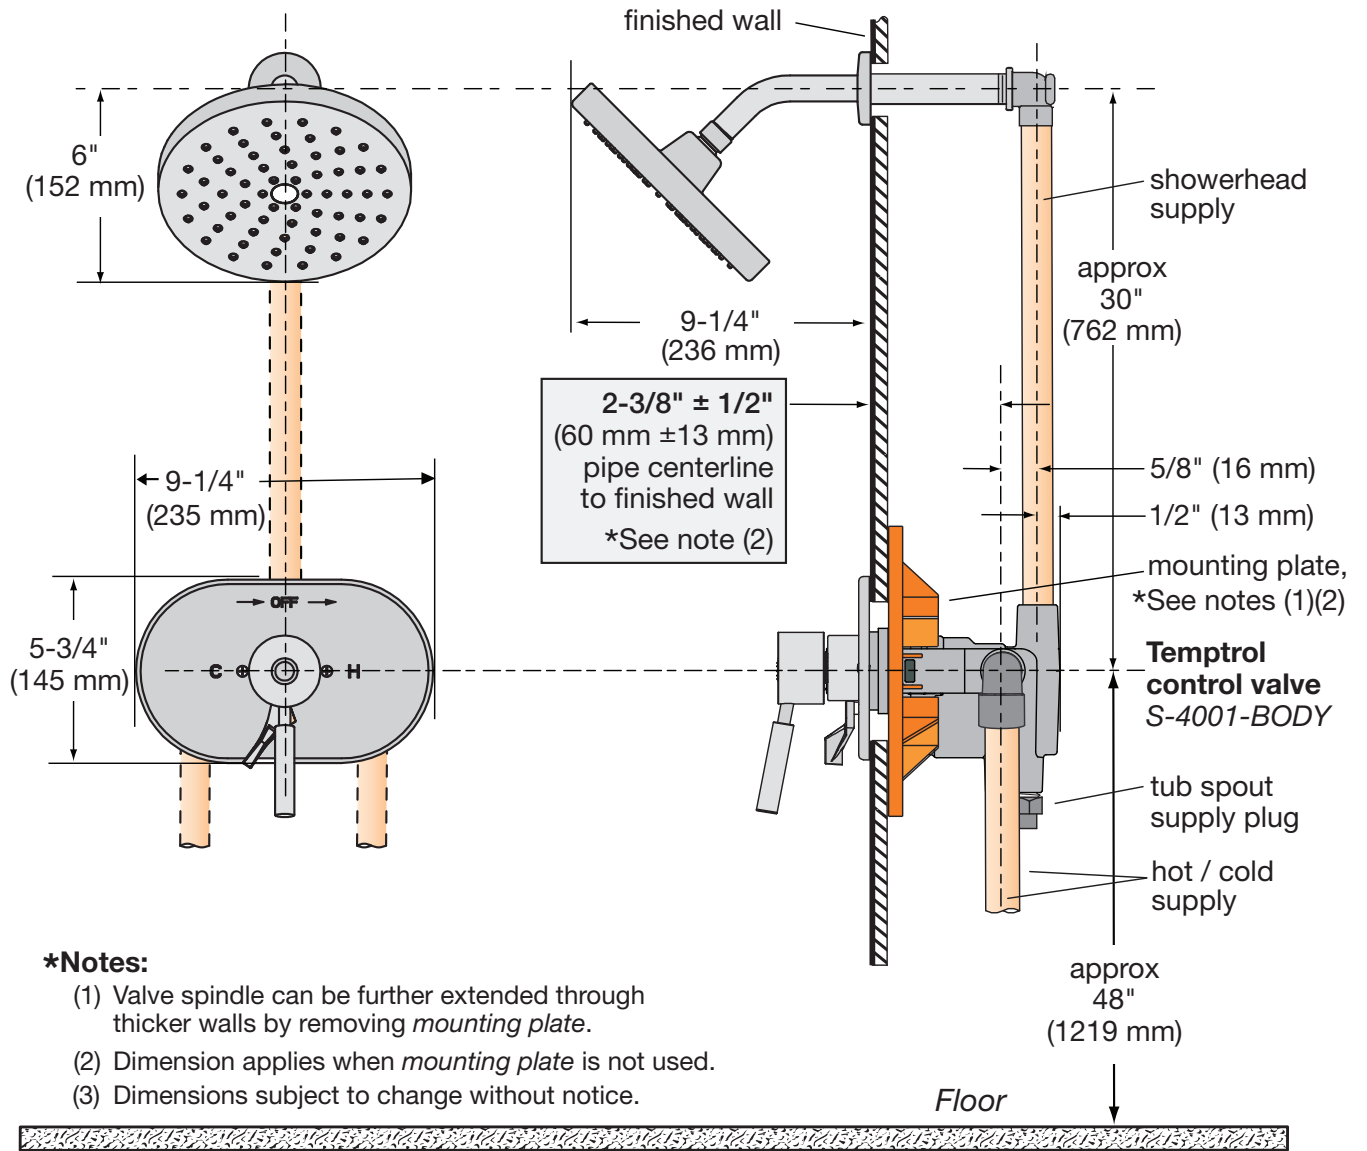

***Notes:**

- (1) Valve spindle can be further extended through thicker walls by removing *mounting plate*.
- (2) Dimension applies when *mounting plate* is not used.
- (3) Dimensions subject to change without notice.