


AVAILABLE IN 2-HOLE: Add "2H" to part number. (Example: 48100-CP-2H)

## PRESFLO®

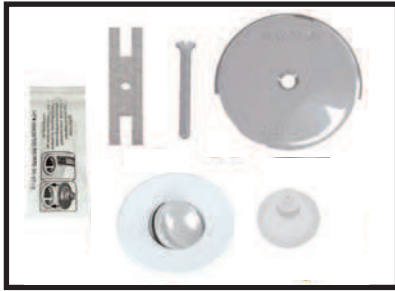

### #48100 Trim Kit

Brass body, plastic stopper assembly, metal overflow plate, adapter bar, screw, suction cup, and silicone adhesive.



For metal stopper, add "-MS".

**48100-CP** .....  
METAL STOPPER

10 PER CARTON

OTHER FINISHES:	AP BN BZ	CB PB WI
-----------------	----------------	----------------



### #48200 Tub Closure

Brass body, plastic stopper assembly, suction cup, and silicone adhesive.



For metal stopper, add "-MS".

**48200-CP** .....  
MS: METAL STOPPER

20 PER CARTON

OTHER FINISHES:	AP BN BZ	CB PB WI
-----------------	----------------	----------------

### NuFIT® PRESFLO® FEATURES

*Does not need crossbars in old body.*

Requires minimum 1.490" I.D. opening  
Flange covers maximum of 2.875" O.D.  
Depth clearance needed = .850"

## PUSH PULL®



### #48500 Trim Kit

Brass body, brass stopper assembly, 3/8" and 5/16" brass pins, metal overflow plate, adapter bar, screw, and silicone adhesive. Old strainer body must have crossbars.

**48500-CP** .....

10 PER CARTON

OTHER FINISHES:	BN BS BZ	PB WH
-----------------	----------------	----------



### #48600 Tub Closure

Brass body, brass stopper assembly, 3/8" and 5/16" brass pins, and silicone adhesive. Old strainer body must have crossbars.

20 PER CARTON

**48600-CP** .....

OTHER FINISHES:	BN BS BZ	PB WH
-----------------	----------------	----------

### NuFIT® PUSH PULL® FEATURES

*Old body MUST have crossbars.*

Requires minimum 1.410" I.D. opening  
Flange covers maximum of 2.875" O.D.  
Depth clearance needed = .860"

## LIFT AND TURN



### #48400 Trim Kit

Brass body, brass stopper assembly, metal overflow plate, adapter bar, screw, and silicone adhesive. Has crossbars in body.

10 PER CARTON

**48400-CP** .....

OTHER FINISHES:	BN BZ	CB PB
-----------------	----------	----------

### LIFT AND TURN REPLACEMENT STOPPER

See #38812 on page 58.



### #48300 Tub Closure

Brass body, brass stopper assembly, and silicone adhesive. Comes with crossbars in strainer body.

20 PER CARTON

**48300-CP** .....

OTHER FINISHES:	BN BZ	CB PB
-----------------	----------	----------

### NuFIT® LIFT AND TURN FEATURES

*Does NOT need crossbars in old body.*

Requires minimum 1.390" I.D. opening  
Flange covers maximum of 2.875" O.D.  
Depth clearance needed = .390"