



# The Next Necessity™

## Instant Hot Water Dispensers


### Model HWT

Stainless Steel Tank dispenses near-boiling 200°F water instantly


Water dispenser and filtration sold separately



### Dimensions

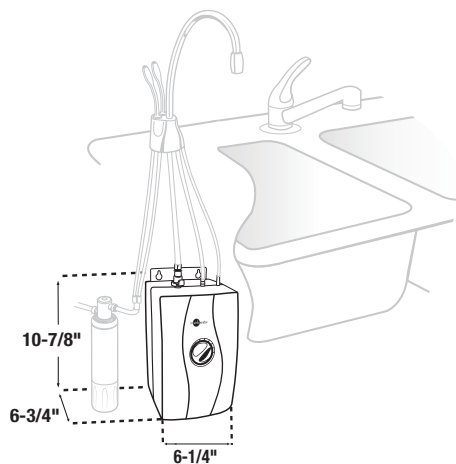

### Job Specifications



### Submittal Sheet

- 2/3-gallon stainless steel tank
- Easy to adjust temperature control
- Tool-free tank connections and dry start protection to ease installation
- Provides 60 cups/hour of near-boiling water
- 115 volts, 750 watts, 6.25 amps
- For use with InSinkErator instant hot water dispensers (excluding model Hot1)

### Specifications

Capacity	2/3-gallon stainless steel tank dispenses 60 cups of 200°F water per hour
Electrical	115 volts, A.C., 750 watts, 6.25 amp heating element with grounded three (3) prong plug
Thermostat	Snap-action, adjustable from 160°F to 210°F (factory pre-set at 200°F)
Insulation	Meets U.L. 94HF-1 flammability specification
Recommended Supply Pressure	30-125 psi
Shipping Weight	Approximately 5.7 lbs.

### Sample Specification

Instant hot water dispenser(s) shall be equipped with an InSinkErator Model HWT stainless steel tank with adjustable temperature from 160°F to 210°F.

### 3-year In-Home Parts and Service Warranty\*

\* The complete InSinkErator warranty is included in the Care & Use booklet packed with each unit.

US Pat. D532,497 (tank enclosure)



Complies with California Lead Plumbing Law

USA  
1-800-558-5700  
www.insinkerator.com

Canada  
1-800-561-1700  
www.insinkerator.ca



**EMERSON**  
Commercial & Residential Solutions

The Emerson logo is a trademark and a service mark of Emerson Electric Co. InSinkErator may make improvements and/or changes in the specifications at any time, in its sole discretion, without notice or obligation and further reserves the right to change or discontinue models.

©2013 InSinkErator, a business unit of Emerson Electric Co. All Rights Reserved.