

Specifications

Buy it for looks. Buy it for life.®

DESCRIPTION

- · Metal construction with various finishes identified by suffix
- 1/2" IPS connections
- · Includes metal pop-up type waste assembly

OPERATION

- · Lever style handles
- Maximum handle rotation angle is 90° to full on for either handle
- Hot side counterclockwise to open (clockwise to close)
- · Cold side clockwise to open (counterclockwise to close)

FLOW

Flow is limited to 1.5 gpm (5.7 L/min) at 60 psi

CARTRIDGE


- 1224 cartridge design
- · Nonmetallic and stainless steel material

STANDARDS

- Third party certified to WaterSense,® CSA B-125.1, ASME A112.18.1, ICC A117.1 and all requirements referenced therein
- · Certified to ANSI/NSF 61/9
- Complies with California Proposition 65 and with the Federal Safe Drinking Water Act
- ADA for lever handle

WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations





ROTHBURY[™] Two-Handle Lavatory Faucet

Models: 6201 series

NOTE: THIS FAUCET IS DESIGNED TO BE INSTALLED THRU 3 HOLES, 1" (25MM) MIN. DIA.



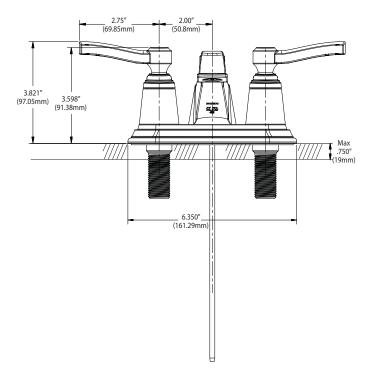

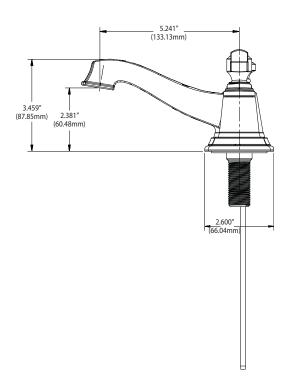

CRITICAL DIMENSIONS

(DO NOT SCALE)

TO ORDER PARTS CALL: 1-800-BUY-MOEN

www.moen.com