



Buy it for looks. Buy it for life.®

# Specifications

## FAUCET DESCRIPTION

- Metal construction with various finishes identified by suffix
- Includes four round single-function flush mount body sprays
- Includes 7" rainshower showerhead, arm and flange
- Includes four function hand shower with 69" hose assembly, drop ell, vacuum breaker and slide bar

## OPERATION

- Flow lever operates counterclockwise through a 90° arc with off at 6 o'clock and maximum flow at the 3 o'clock position. Shut off in clockwise direction
- Temperature lever operates through a 340° arc with maximum cold at full clockwise rotation and maximum hot at full counterclockwise rotation
- Safety stop preset temperature at 105°F (4°C)
- Safety stop override allows maximum temperature at 120°F (49°C)
- Factory established temperature range from 70°F (21°C) to 120°F (49°C)
- Body spray face tilts 20 degrees in any direction

## FLOW

- Showerhead and handshower are limited to 2.5 gpm (9.5 L/min)
- Bodysprays limited to 2.0 gpm each (7.6 L/min)

## CARTRIDGE


- 147208 thermostatic cartridge design with non metallic/nonferrous materials
- 147210 volume ceramic disc cartridge design

## STANDARDS

- Third party certified to: CSA B-125.1, ASME A112.18.1, ASSE1016 and all applicable requirements referenced therein

## WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations

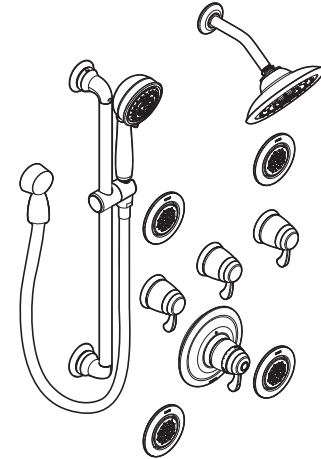

## MOEN® 3/4" Thermostatic Vertical Spa



Model: TS276 series

### Valve Models: (Sold separately)

S3371: 3/4" Thermostatic Valve (1 required)

S3600: Volume Control Valve (3 required)

S1300: Body Spray Rough-In Valves (4 required)

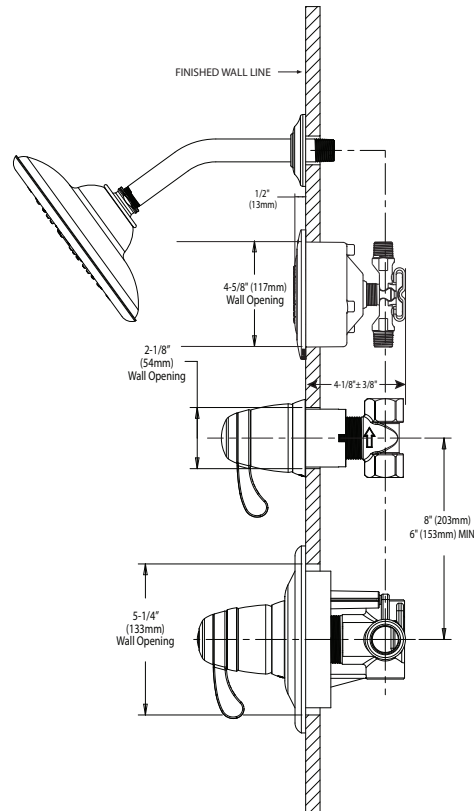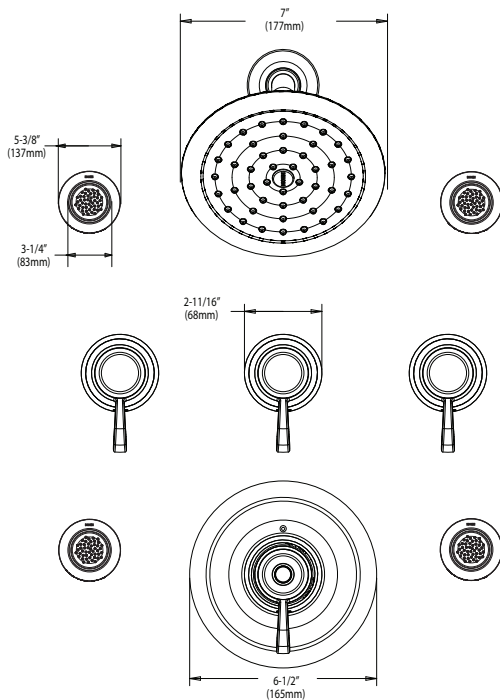

## CRITICAL DIMENSIONS

(DO NOT SCALE)

FOR MORE INFORMATION CALL: 1-800-BUY-MOEN

www.moen.com