

Sensor Operated TOTO® Soap Dispenser

FEATURES

- Sensor operated foaming soap dispenser
- Self-adjusting sensor spout with base unit, mounted hardware and supply lines
- Chrome plated
- Single-hole mount
- Required to use TOTO Soap

MODELS

- TES1ADC-05 - One spout
Dispenser and one 1.06 gallon tank with 16' 5" (5m) tube and cord
- TES2ADC-05 - Two spouts
Dispenser and one 1.06 gallon tank with 16' 5" (5m) tube and cord
- TES3ADC-05 - Three spouts
Dispenser and one 1.06 gallon tank with 16' 5" (5m) tube and cord
- TES3ADC-12 - Three Spouts (Special Order)
Dispenser and one 1.06 gallon tank and one 5.8 gallon sub tank with 39' 5" (12m) tube and cord
- TES4ADC-12 - Four Spouts (Special Order)
Dispenser and two 1.06 gallon tanks and one 5.8 gallon sub tank with 39' 5" (12m) tube and cord
- TES5ADC-12 - Five Spouts (Special Order)
Dispenser and two 1.06 gallon tanks and one 5.8 gallon sub tank with 39' 5" (12m) tube and cord
- TES6ADC-12 - Six Spouts (Special Order)
Dispenser and two 1.06 gallon tanks and one 5.8 gallon sub tank with 39' 5" (12m) tube and cord

- Available:
TOTO Soap (Sold Separately)

Product No.	Quantity	Packaging	Notes
TSFB1	4 gallons	Package of 4, 1 gal. each	Antimicrobial Soap (Fragrance Free)
TSFB5	5 gallons	Packaged as 1, 5 gal. container	Antimicrobial Soap (Fragrance Free)
TSFB1-GS	4 gallons	Package of 4, 1 gal. each	TOTO Foam Soap Green Seal™ (Lilac)
TSFB5-GS	5 gallons	Packaged as 1, 5 gal. container	TOTO Foam Soap Green Seal™ (Lilac)
TSFB55	55gallons	Packaged as 1, 55 gal. drum	Antimicrobial Soap (Fragrance Free)



CODES/STANDARDS

- Meets and exceeds UL1951, CSA C22.2 #68
- Certifications: UL
- Code Compliance: NEC, CEC



PRODUCT SPECIFICATION

TOTO® Model No. _____
Automatic infrared sensor activated, soap dispenser with 1.06 gallon soap tank and 5.8 gallon sub tank for special order. Automatic sensor adjustment on installation.

COLORS/FINISHES

- #CP Polished Chrome
- #BN Brushed Nickel
- #PN Polished Nickel

TES_ADC-05 & TES_ADC-12 Series

Sensor Operated TOTO® Soap Dispenser

SPECIFICATIONS


- **Warranty** Three Year Warranty*
- **TOTO® Soap** TSFB1 - 4 Gallons (Package of 4, 1 gal. ea.)
TSFB5 - 5 Gallons (Packaged as one 5 gal. container)
- **Power supply** Input: AC 120V 60 Hz
Output: 24V
- **Length of Power Supply Cord** 51" (1.3m)
- **Tank Capacity** 1.06 Gallon (Optional 5.8 Gallon tank available for total capacity of 6.8 gallons for 3 spout model or 8 gallons with 4+ spout models)
- **Soap Dispensing Quantity** Factory setting at 1ml (foam)
- **Length of Cord for Tank to Spout** 16' 5" (5m), special order 39' 5" (12m)
- **Dispensing Timer Adjustability** Timing controlled from 0.2-20 seconds
- **Detection range** 4" (110mm)

INSTALLATION NOTES


- Dispenser hole diameter:
- Standard = 1" ~ 1-1/8" (25 ~ 28mm)
 - With THP3140#CP Escutcheon = 1-1/8" ~ 1-1/2" (28 ~ 38mm)

These specifications are subject to change without notice.
*Failure to use TOTO Soap will void warranty.

TES1ADC-05

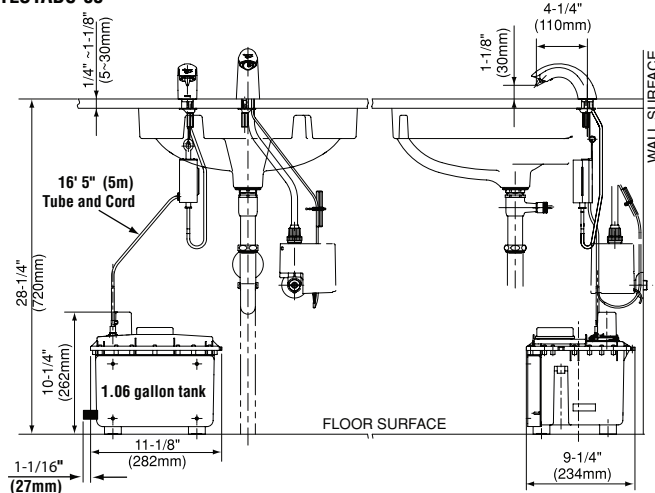

TES3ADC-12 (Special Order)

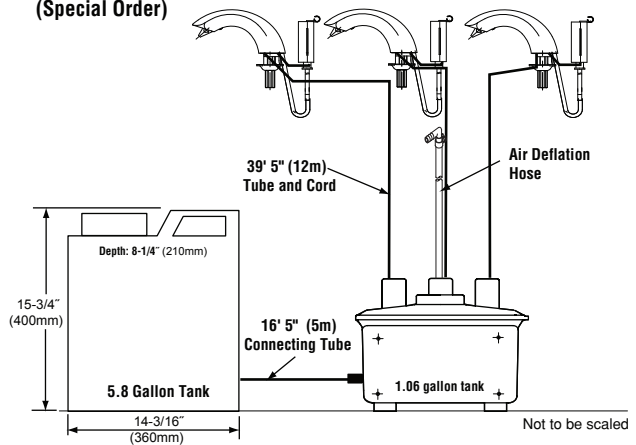

Maximum deck thickness 1-1/8" (30mm)
Leave 2" (50mm) extra space around the 1.06gallon tank for placement of sensor and power supply cords.

TOTO®

These dimensions and specifications are subject to change without notice