



PVC & CPVC Schedule 80 Fittings, Unions, Tank Adapters, Expansion Joints & Saddles



TECHNICAL INFORMATION WEIGHTS & DIMENSIONS



Visit our web site
www.spearsmfg.com



PVC & CPVC SCHEDULE 80 FITTINGS, UNIONS, TANK ADAPTERS, EXPANSION JOINTS & SADDLES

Injection Molded Dimensions References:

G = (LAYING LENGTH) intersection of center lines to bottom of socket/thread; 90° elbows, tees, crosses; $\pm 1/32$ inch.
H = Intersection of center lines to face of fitting; 90° elbow tees, crosses; $\pm 1/32$ inch.
J = Intersection of center lines to bottom of socket/thread; 45° elbows; $\pm 1/32$ inch


L = Overall length of fittings; $\pm 1/16$ inch.
H = Outside diameter of socket/thread hub; $\pm 1/16$ inch.
N = Socket bottom to socket bottom; couplings; $\pm 1/16$ inch
W = Height of cap; $\pm 1/16$ inch.

Fabricated Dimension References:

G = (LAYING LENGTH) intersection of center lines to bottom of socket/thread; 90° elbows, tees, crosses $\pm 1/4$ inch; 14" & larger $\pm 1/2$ inch.
H = Intersection of center lines to face of fitting; 90° elbows $\pm 1/4$ inch, 14" & larger $\pm 3/4$ inch; wyes $\pm 1/2$ inch; tees, crosses $\pm 1/4$ inch; 14" & larger $\pm 1/2$ inch.
J = Intersection of center lines to bottom of socket/thread; 45° elbows; $\pm 1/4$ inch; 14" & larger $\pm 1/2$ inch.


L = Overall length of fittings; $\pm 1/2$ inch; 14" & larger ± 1 inch; wyes ± 1 inch.
M = Outside diameter of socket/thread hub; $\pm 1/4$ inch.
N = Socket bottom to socket bottom; couplings; $\pm 1/2$
W = Height of cap; $\pm 1/4$ inch.

Typical Fabricated Dimension References

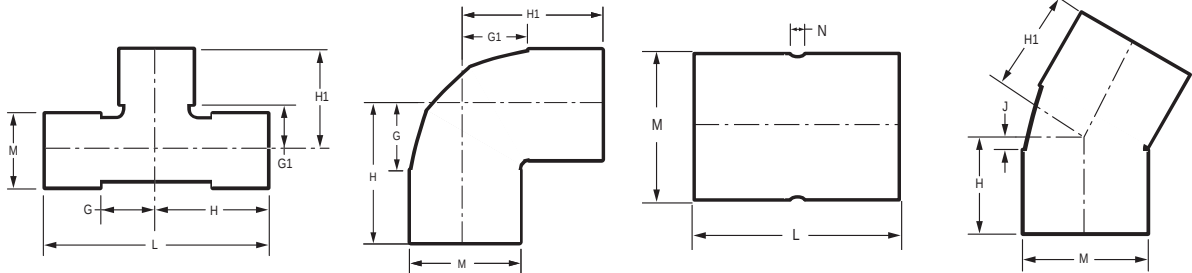

TEE

Socket x Socket x Socket



Part Number		Size	G	G1	H	H1	L	M	Approx. Wt. (Lbs.)	
PVC	CPVC								PVC	CPVC
801-002	801-002C	1/4	5/16	5/16	31/32	31/32	1-15/16	27/32	.04	.04
801-003	801-003C	3/8	15/32	15/32	1-1/4	1-1/4	2-1/2	31/32	.06	.06
801-005	801-005C	1/2	17/32	17/32	1-15/32	1-15/32	2-15/16	1-3/16	.11	.11
801-007	801-007C	3/4	21/32	21/32	1-11/16	1-11/16	3-13/32	1-13/32	.16	.18
801-010	---	1	7/8	7/8	2	2	4	1-3/4	.27	---
---	801-010C	1	27/32	27/32	2	2	3-31/32	1-23/32	---	.29
801-012	801-012C	1-1/4	1-1/32	1-1/32	2-9/32	2-9/32	4-19/32	2-3/32	.39	.40
801-015	801-015C	1-1/2	1-3/16	1-3/16	2-9/32	2-9/32	5-1/8	2-3/8	.52	.57
801-020	801-020C	2	1-11/32	1-11/32	2-15/16	2-15/16	5-27/32	2-7/8	.80	.85
801-025	---	2-1/2	1-3/4	1-3/4	3-1/2	3-1/2	7-1/32	3-15/32	1.46	---
---	801-025C	2-1/2	1-23/32	1-23/32	3-1/2	3-1/2	7	3-15/32	---	1.62
801-030	801-030C	3	2-3/32	2-3/32	3-31/32	3-31/32	7-15/16	4-3/16	2.16	2.43
801-040	801-040C	4	2-1/2	2-1/2	4-3/4	4-3/4	9-1/2	5-1/4	3.52	3.72