



# CONTROLLERS

## WIRED RAIN/FREEZE SENSORS


### 420GLS/420LS

Wired Rain/Freeze Sensors

- ✓ Rain shut-off settable from 1/8- 1" (3 - 25 mm)
- ✓ Tough UV-stabilized plastic housing
- ✓ Replaceable absorptive disks
- ✓ No-rust extruded aluminum bracket - mounts anywhere
- ✓ UL-listed watertight switch provides years of reliable service works with virtually all 24VAC controllers
- ✓ Each unit factory tested
- ✓ 35 feet of cable provided

#### 420LS ADDS:

- ✓ Extra-long 7" aluminum bracket
- ✓ Factory-set freeze thermostat

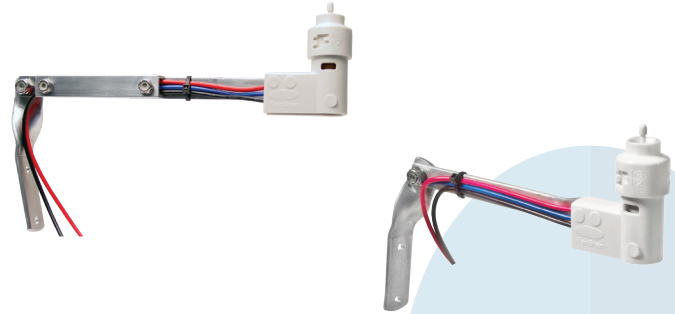

#### Sensor Specifications

MODEL	DESCRIPTION
420GLS	Wired Rain Sensor (35' of cable)
420LS	Wired Rain/Freeze Sensor (35' of cable)



### RAIN/FREEZE SENSOR COMPARISON

	420LS	420GLS	RFS1	RFS5
Controller Compatibility	All 24 volt controllers	All 24 volt controllers	ProLine SmartLine	ProLine SmartLine
Connectivity	Wired	Wired	Wired	Wireless
Rain/Freeze Sensing	Rain/Freeze	Rain	Rain/Freeze	Rain/Freeze
Battery	None	None	None	10-year Battery life



**1,000 gallons** given per sensor

Our mission is to deliver clean drinking water to thousands of families in need, and to inspire our partners to put water first in irrigation, design, installation, and maintenance.

