

DESCRIPTION

- Metal construction with chrome plating, chrome with LifeShine® polished brass accents, LifeShine® polished brass, platinum or glacier finish
- Includes head, arm and flange

OPERATION

- Lever style handle
- Handle operates counterclockwise through a 270° arc with off at 6 o'clock and maximum hot at the 9 o'clock position. Shut off in clockwise direction
- Adjustable temperature limit stop to control maximum hot water temperature
- Pressure balancing mechanism maintains selected discharge temperature to $\pm 2^\circ$

FLOW

- Showerhead is limited to 2.5 gpm (9.5 L/min)

CARTRIDGE

- 1222 cartridge design
- Nonmetallic/nonferrous and stainless steel materials
- Accommodates back to back installations

STANDARDS

- Third party certified by CSA to meet CSA B-125, ASME A112.18.1M and all applicable requirements referenced therein and complies with the applicable requirements of ANSI A117.1

WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations




Villeta™ Posi-Temp® Single-Handle Shower Only Trim Kit

**Models: TL2392, TL2392CP, TL2392P,
TL2392PM, TL2392W**
(Bulk Packed 12 per carton)

**Models: TL2302, TL2302CP, TL2302P,
TL2302PM, TL2302W**
(Packed 1 per carton)

**NOTE: See reverse side
for illustrated parts**

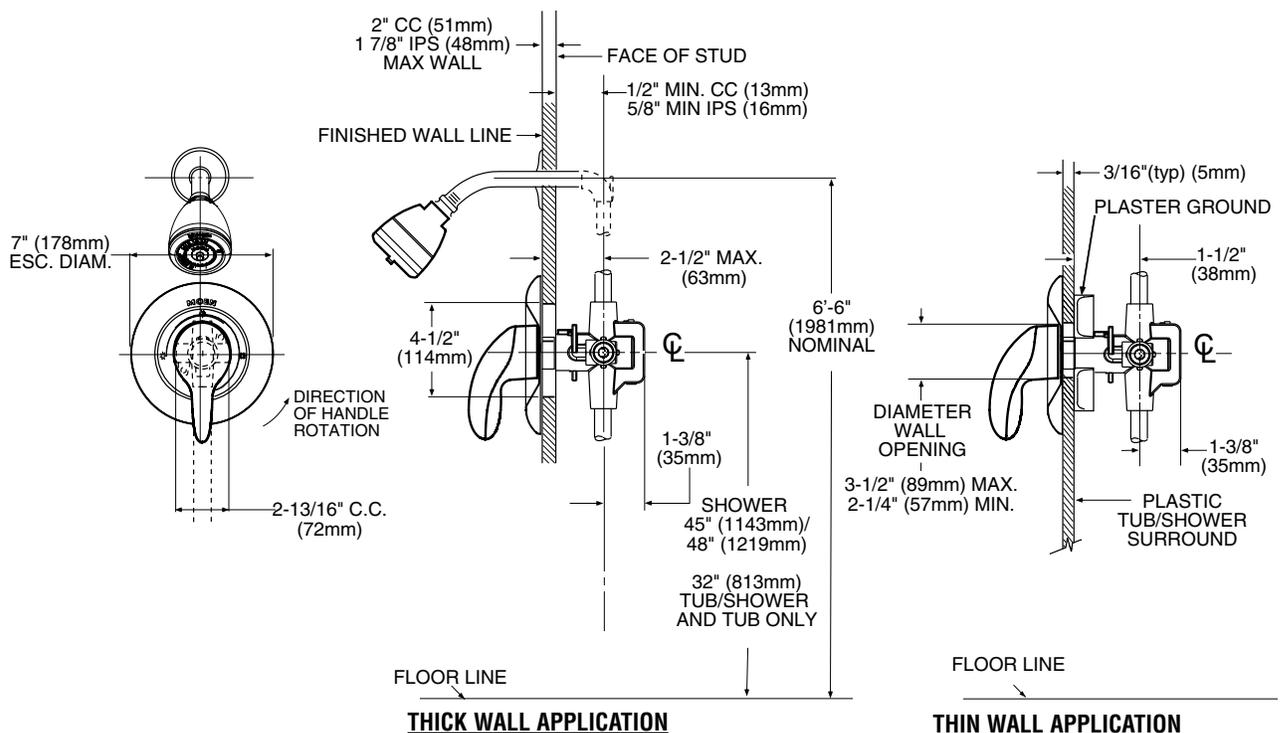

CRITICAL DIMENSIONS

(DO NOT SCALE)



ADA symbol applies to shower valve control only.