

FFM-RHOMBUS **FOG FREE MIRROR**

Rough-In Guide





RHOMBUS

SPECIFICATIONS

| Construction | Glass Mirror |
|-----------------------|------------------------------|
| w/304 | 4 Stainless Mounting Bracket |
| Controllability | User to provide switching |
| Transformer output | 12vac |
| Input | 120VAC |
| Mirror Heater Wattage | e50W |

Basic Features:


- Assembled mirror with heating pad
- Transformer wiring: 120V Input (blackwhite), 12V Output (red-blue)
- 2 Solder-less connectors
- Backed with Metal mounting frame
- 1/4" Thick Glass w/Polished Edges
- Able to withstand 250°F
- Mirror has PVC film shatter protection


Product Specification:

1/4" thick glass with metal mounting support bracket. Mirror mounts with two supplied screws and wall anchors.

Installation Notes:

Install per 81161 install instructions. For product manual and, customer support; see WWW.Thermasol.com



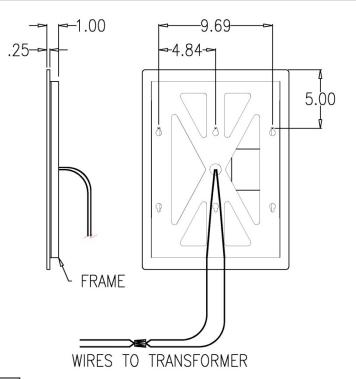

Shipping Information:

Weight.....21 lbs. Length......30.75 in. Width.....18.32 in.

Height......4.68 in.

For any further assistance please contact ThermaSol at 800.776.0711 or sales@thermasol.com

WIRES TO TRANSFORMER CONNECTIONS

