


The Model HC67 & HCB67 are freezeless hot and cold mixer wall hydrants with automatic draining and hose connection Backflow Prevention. Hydrant drains when shut off, *even if hose is attached*. The Model HCB67 is enclosed in a flush mounted wall box. Both models are designed for commercial irrigation purposes where outside Hot & Cold water service is required.

SPECIFICATIONS:

PATENTED HIGH FLOW DOUBLE CHECK BACKFLOW PREVENTER

- NIDEL® Model 50HA with 3/4 inch male hose thread
- ASSE Standard 1052 approved 
- Field Testable
- Two Independent Check Valves
- Drains automatically when hose is removed
- No spray back


FEATURES:

- Permanent type brass valve body with hemispherical seating surface.
- One piece valve plunger accurately controls both flow and drainage with a minimum number of turns and without need for adjustments.
- Drains under nozzle away from hands of operator and with a lip to divert water away from building.
- Copper casing tubes.
- No Lead Solder on all solder joints.
- Hardened stainless steel stem resists damage.
- Loose key operates hydrant.
- 3/8" solid brass operating rod.
- 3/4" FPT Hot & Cold Inlets
- Check valves are located in each inlet to prevent migration
- Wall clamp furnished on all 60 series except close coupled.
- Max Pressure: 125 p.s.i.
- Max Temperature: 120° F

ACCESS!

DO NOT INSTALL WITHOUT SERVICE ACCESS TO MIXER BODY AND INLETS.

For Troubleshooting Instructions go to www.woodfordmfg.com or call 1-800-621-6032

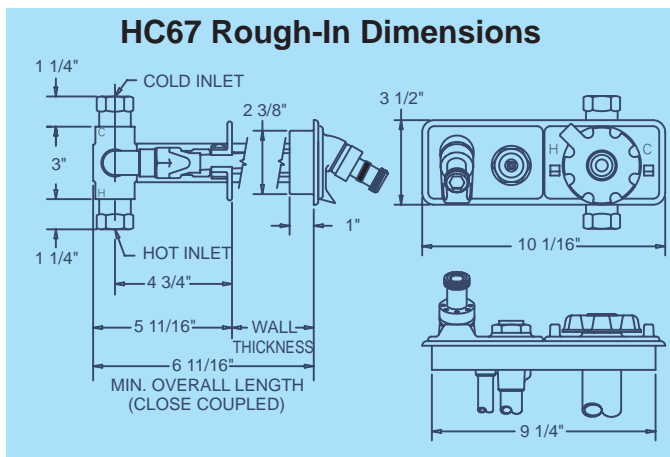


Freezeless Wall Hydrants Hot & Cold Mixer Automatic Draining



**With Patented Model 50
High Flow Double Check
Backflow Preventer**


Model HC67/HCB67

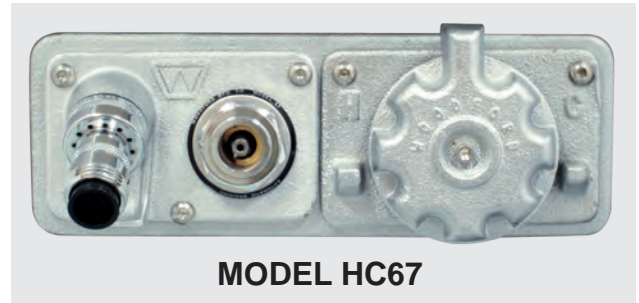

MODEL HC67

Exterior Finish


Standard - Chrome (CH)
Optional - Brass (BR)

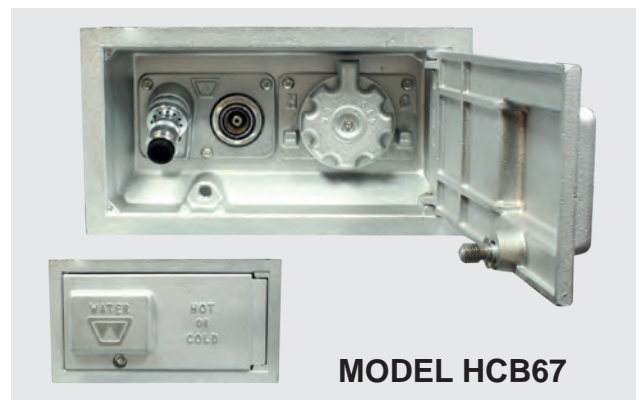

MODEL HCB67

Exterior Finish: Box & Door

Standard - Chrome (CH)
Optional - Brass (BR) Polished Brass (PB)

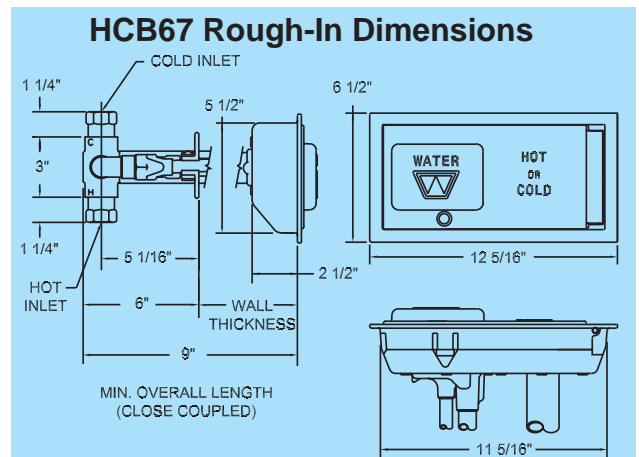

When ordering, specify model number and wall thickness.