



Model 80 shown with optional glass door.


Design features:

DURASTALL® Model 80 & 82 includes...

- Slip-resistant floor with drain
- Shower valve and head
- Shower curtain and curtain rod
- Safety railing with molded-in soap dish and shampoo holder
- Mold and mildew-resistant components
- Knock-down construction makes portability extremely easy and is free-standing when assembled.
- Two styles of optional shower doors are available.
- Easy to assemble and install.


- Available in both standard and extended bases;

Model 80 Standard Base



Standard bases include a PVC drain for direct connection to a 2" (Sch. 40) ABS, PVC or iron DWV pipe.


Model 82 Extended Base

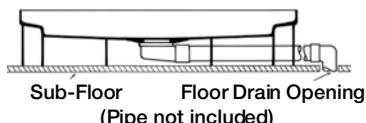

Extended bases eliminate the need to position the shower stall base directly over the floor drain. This offset allows for greater freedom in positioning the shower. Includes side outlet drain for 1-1/2" PVC pipe.

Specifications

Model	Color	Size	Base	A	B	C	D	UPC
80	White	32" X 32"	Standard	32-5/8"	75-3/8"	16-5/16"	24"	6 71031 00314 0
82	White	32" X 32"	Extended	32-5/8"	77-7/8"	16-5/16"	24"	6 71031 00315 7

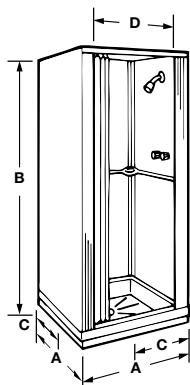

General: Furnish and install as shown on plans, free-standing DURASTALL® Shower Stall model ____ (80, 82) as manufactured by E.L. Mustee & Sons, Inc. Consists of three, white, high-gloss thermoplastic walls, molded top frame, rigid aluminum front supports, slip-resistant 32" x 32" base, one-piece wrap-around railing with built-in soap dish and container. Skid-resistant floor with drain assembly, shower valve and head, shower curtain and rod, plus assembly hardware. Placement of valve assembly to be determined by installer.





MUSTEE

Preferred by the "Pros"

80 & 82 DURASTALL® Shower Doors



Design features:

- Both doors fit all DURASTALL® shower stalls
- Sturdy, rust-resistant. engineered aluminum frame with polished chrome finish
- May be hung to open to accommodate a left or right hand opening
- Continuous-pull handle with magnetic seal
- Easy to install and clean...all components are mold and mildew resistant.
- Door height is 64"

Standard Door

Model	Type Panel	UPC	Opening	Height
85.700	Obscure Crystal Styrene	6 71031 00222 8	24"	64"

Glass Door

Model	Type Panel	UPC	Opening	Height
88.700	Obscure Glass	6 71031 00223 5	24"	64"



MUSTEE

E.L. Mustee & Sons, Inc. • 5431 West 164th Street • Brook Park, OH 44142 • Phone: 216.267.3100 • Fax: 216.267.9997
E-mail: info@mustee.com. • Web: www.mustee.com • Proudly made in the USA

Notice: Our continuous commitment to product improvement may result in changes to product specifications without notice.
Patents pending. Made and Printed in U.S.A.