

MIX-60-A

► **Description**

Below Deck Mechanical Water Mixing Valve for use with a single Sloan Optima[®] faucet.

► **Model**

□ Model MIX-60-A

Supplied with Sloan Optima and Optima Plus faucets that are specified with the "BDM" (Below-Deck-Mixer) variation.

► **Specifications**



Mechanical Water Mixing Valve with the following features:

- Designed to install under the lavatory
- Installs in place of the Tee fitting supplied with the faucet prior to the solenoid valve
- Equipped with integral check valves at inlets
- 3/8" compression fittings on inlets and outlet
- Compression sleeves and nuts included
- Lever dial adjustment with lock screw: COLD-HOT
- Brass construction
- Chrome plated finish

► **Flow Capacities**

| SYSTEM PRESSURE | | | | | | |
|-----------------|------|------|-------|-------|-------|-------|
| PSI | 20 | 30 | 40 | 50 | 60 | 70 |
| BAR | 1.4 | 2.1 | 2.8 | 3.4 | 4.2 | 4.9 |
| GPM | 1.75 | 2.25 | 2.75 | 3.0 | 3.5 | 4.0 |
| Lpm | 6.62 | 8.51 | 10.40 | 11.35 | 13.25 | 15.14 |

CAUTION! This is a mechanical hot and cold mixing valve only! It **DOES NOT** provide automatic control of water temperature. Hot water in excess of 110°F (43°C) is dangerous and **CAN CAUSE SCALDING!**

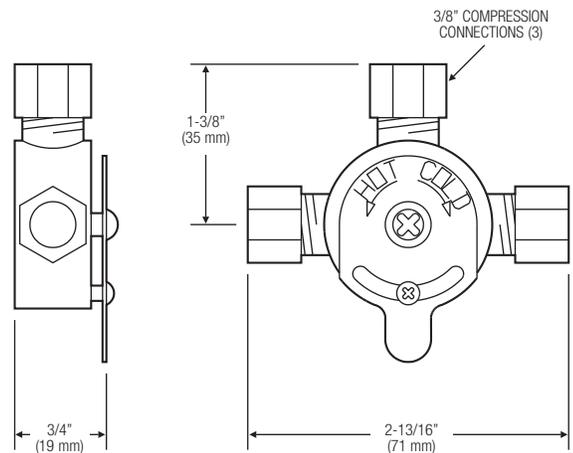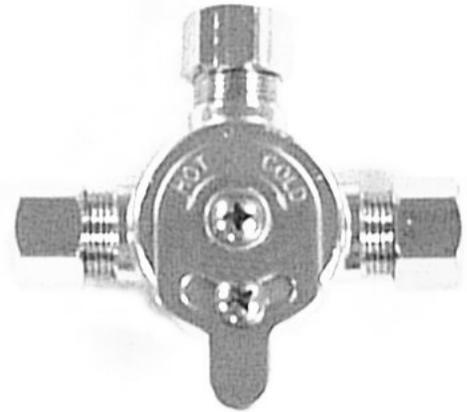

| | |
|--|----------------|
| This space for Architect/Engineer approval | |
| Job Name _____ | Date _____ |
| Model Specified _____ | Quantity _____ |
| Variations Specified _____ | |
| Customer/Wholesaler _____ | |
| Contractor _____ | |
| Architect _____ | |