

Double Pantry Faucet

Architect/Engineering Specifications:

Single hole deck mount mixing faucet with polished chrome plated brass body, 5 3/4" swivel/rigid gooseneck with 2.2 GPM vandal resistant aerator, compression cartridges with spring checks, lever handles with vandal resistant screws and 18" flexible stainless steel supply hoses with 1/2" NPSM / 5/8" O.D. compression connections. Certified to ASME A112.18.1 / CSA B125.1, NSF 61-Section 9 and NSF 372. Meets ADA ANSI/ICC A117.1 requirements.





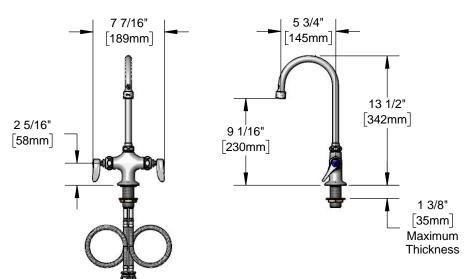

Features & Benefits:

- Single hole deck mount mixing faucet w/ polished chrome plated brass body
- 5 3/4" swivel/rigid gooseneck
- Includes lock washer to convert to rigid
- 2.2 GPM vandal resistant aerator, Series 6 (B-0199-06)
- Quarter-turn Eterna compression cartridges w/ spring checks to prevent cross flow of water
- Lever handles w/ color coded indexes & vandal resistant screws
- 18" flexible stainless steel supply hoses w/ 1/2" NPSM / 5/8" O.D. compression connections
- Material: Polished chrome plated brass body & tubular spout, and chrome plated metal handles

Product Compliance:

- ASME A112.18.1 / CSA B125.1
- NSF 61 Section 9
- NSF 372 (Low Lead Content)
- ANSI A117.1 (ADA)

Warranty: One Year (Limited)

Performance Data:

Pressure: 20 - 125 psi Temperature: 40°F - 140°F Flow Rate: 2.2 GPM @ 60 psi







Optional Outlets (Series 1 / VR Series 6)

GPM	Aerated	Non-Aerated (Laminar)	VR Aerated	VR Non-Aerated (VR Laminar)	Optional Handles
0.35	N/A	□ B-0199-01-N035	N/A	□ B-0199-06-N035	☐ 4" Wrist Action
0.5	N/A	□ B-0199-01-N05	N/A	□ B-0199-06-N05	□ Lever (Standard)
1.0	□ B-0199-01-F10	N/A	□ B-0199-06-F10	N/A	□ 4-Arm
1.5	□ B-0199-01-WS	N/A	□ B-0199-06-WS	N/A	- 4 - 1- 11
2.2	□ B-0199-01	N/A	Standard	N/A	Optional Cartridges
					□ Quarter-Turn Cerama w/ Check Valve□ Quarter-Turn Eterna w/ Spring Checks (Standard)







T&S BRASS AND BRONZE WORKS, INC.

