




Architect/Engineering Specifications:

8" wall mount concealed mixing faucet with brass body, 6" tall adjustable wall flanges & sleeves, polished chrome plated brass spout with pail hook and garden hose outlet, compression cartridges with spring checks, 4-arm handles, loose key stops with tee-handle, upper wall support rod and 1/2" NPT female inlets and outlet. Certified to ASME A112.18.1/CSA B125.1. Meets ADA ANSI/ICC A117.1 requirements

Job Name _____
 Model Specified _____ Quantity _____
 Variations Specified _____
 Date _____

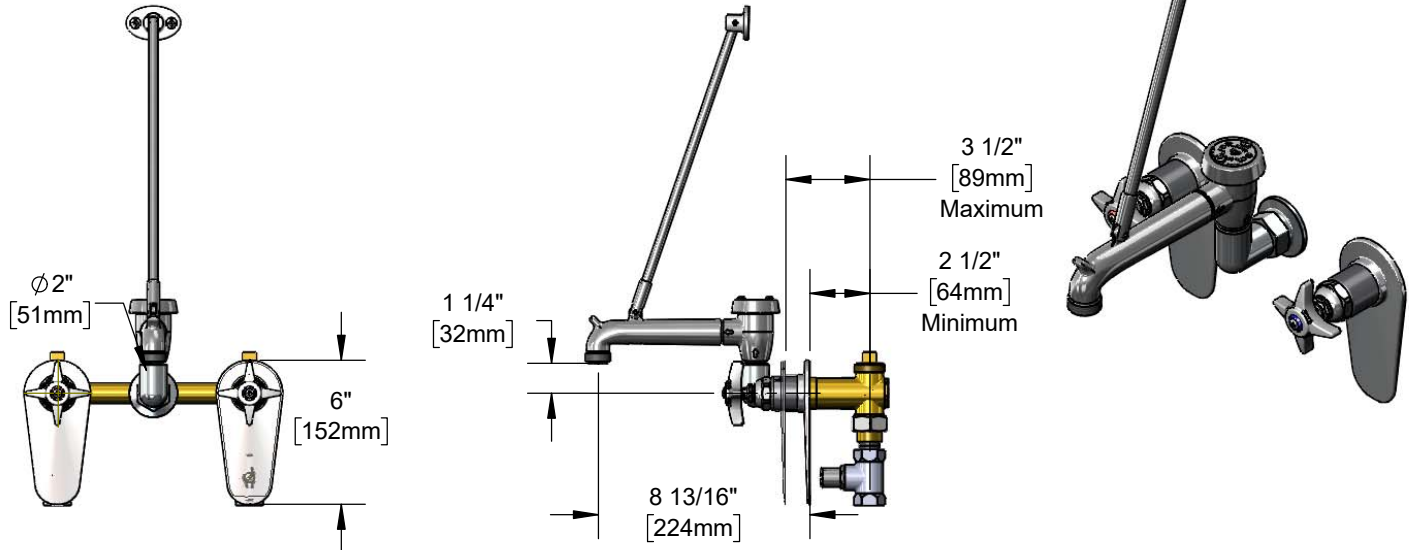

Features & Benefits:

- 8" concealed bypass mixing valve w/ 1/2" NPT female union inlet connections
- 6" tall polished chrome plated brass adjustable wall flanges & sleeves
- Polished chrome plated spout assembly w/ $\phi 2"$ wall flange, pail hook & male garden hose outlet
- Quarter-turn Eterna compression cartridges w/ spring checks to prevent cross flow of water
- 4-arm handles w/ color coded indexes
- Loose key stops w/ tee-handle and screw
- 1/2" NPT female inlets (may be supplied from above or below)
- Upper wall support rod
- Material: Brass bodies with polished chrome plated adjustable flanges, support rod and chrome plated metal handles

Product Compliance:

- ASME A112.18.1 / CSA B125.1
- NSF 61 Exempt (Non-Potable)
- ANSI A117.1 (ADA)

Warranty: One Year (Limited)

Performance Data:

- Pressure: 20 - 125 psi
- Temperature: 40 °F - 140 °F
- Flow Rate: 11.06 GPM @ 60 psi



ADA Compliant

Optional Cartridges With Checks

- ☐ Quarter-Turn Cerama w/ Check Valve
- ☐ Quarter-Turn Eterna w/ Spring Check (Standard)

Optional Handles

- ☐ 4" Wrist Action
- ☐ Lever
- ☐ 4-Arm (Standard)

