

## Red Handles for Use with Acetylene



AA-1



AA-3



GG-4

## ACET-O-LITE® "Screw-in Style"

AA-1 has the adjustment valve in the front for single hand operation, the AA-3 has the valve in the rear for fingertip control. Needle valve design enables very fine flame adjustments. *These torches will keep your tips burning efficiently in drafts, winds, and adverse conditions.* Both torches are made with quality brass, have very durable handles and use standard 3/8-24 LH "A" size hose fittings.

Goss Acet-O-Lite torches work with all "BA" style tips listed on page 7.

## TARGET TORCH® "Snap-in Style"

This handle has a quick disconnect fitting to rapidly change tips. Comfortable grooved handle is made of very durable materials. Uses 3/8-24 LH "A" jipse fittings.

Goss Target Torch handle will work with all "GA" style tips listed on page 8.

## SPECIALTY TIPS "Snap-in Style"

SNAP-IN design used with GG-4 handle. Dual feather flame design for special applications. Also available with screw-in style: BA-TT and BA-GT.

### SPLIT-FIRE® TIPS



GA-TT

GA-GT

TIP NUMBER	FLAME DIAMETER	SOFT SOLDER	SILVER BRAZING
BA-TT	(2) 1/4"	3/4"	3/4"
BA-GT	(2) 1/4"	3/4"	3/4"
GA-TT	(2) 1/4"	3/4"	3/4"
GA-GT	(2) 1/4"	3/4"	3/4"
GA-3J	1/4"	1/4" to 1"	1/8" to 1/2"
GA-8J	3/8"	1" to 2"	1/2" to 1"



COLOR-CODED "O" RINGS  
Red for Acetylene

## "Snap-in Style"

The J-Tip design allows you to solder or braze in hard-to-reach areas while safely pointing the flame away from flammable surfaces.

### J-Tips



GA-3J

GA-8J


## ACETYLENE REGULATORS

These UL LISTED regulators, manufactured from solid brass, are made for rugged use. *They have a specially designed conical seat and diaphragm.* The inlets have filters to prevent dirt from entering the regulator.

**EA-1G** B cyl. connection; "A" Hose fitting 3/8 - 24 L.H.

**EA-2G** MC cyl. connection; "A" Hose fitting 3/8 - 24 L.H.

GAUGE ONLY  
Part No.  
MA-80-16

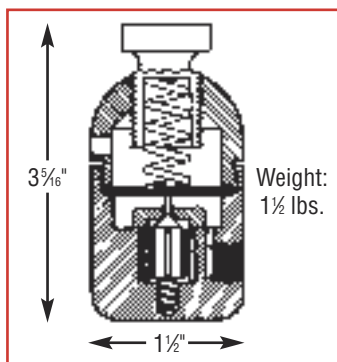

3 5/16"

Weight:  
1 1/2 lbs.

1 1/2"



## ACETYLENE HOSE

Hose assemblies are made of quality 7/16" OD x 3/16" ID single ply fabric reinforced Grade R hose.

*It has a 200 PSI working pressure.*

**HA3-6** Hose 6 feet long with "A" (3/8 - 24) connections

**HA3-12** Hose 12 feet long with "A" (3/8 - 24) connections

**HA3-25** Hose 25 feet long with "A" (3/8 - 24) connections

