MOEN®
COMMERCIAL

# Specifications

**FAUCET DESCRIPTION**
- Chrome plated brass and metal construction
- Supplied with vandal resistant screws

**OPERATION**
- Lever style handle with temperature indicator on the escutcheon
- Pull-on/push-off operation
- Temperature operates through an 180° arc of handle travel (full cold to full hot)
- Adjustable temperature limit stop to limit the handle travel in the HOT direction
- Pressure balancing mechanism maintains selected discharge temperature to ± 2°

**CARTRIDGE**
- Combine with a Moentol valve:
  *Includes the 1225 cartridge
- Nonmetallic/nonferrous and stainless steel materials
- Accommodates back to back installations

**STANDARDS**
- Third party certified to: ASME A112.18.1/CSA B-125.1 and all applicable requirements referenced therein including NSF61/9
- **ADA** for lever handle

**WARRANTY**
- Warranted for 5 years against material or manufacturing defects

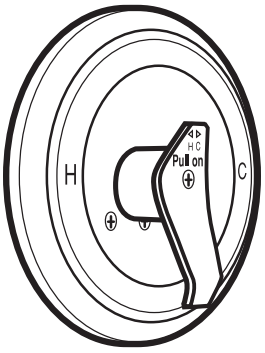


**Single-Handle Moentrol Pressure Balancing Tub/Shower Valve Trim Only**

**Model:** T8350

BUY AMERICAN ACT COMPLIANT

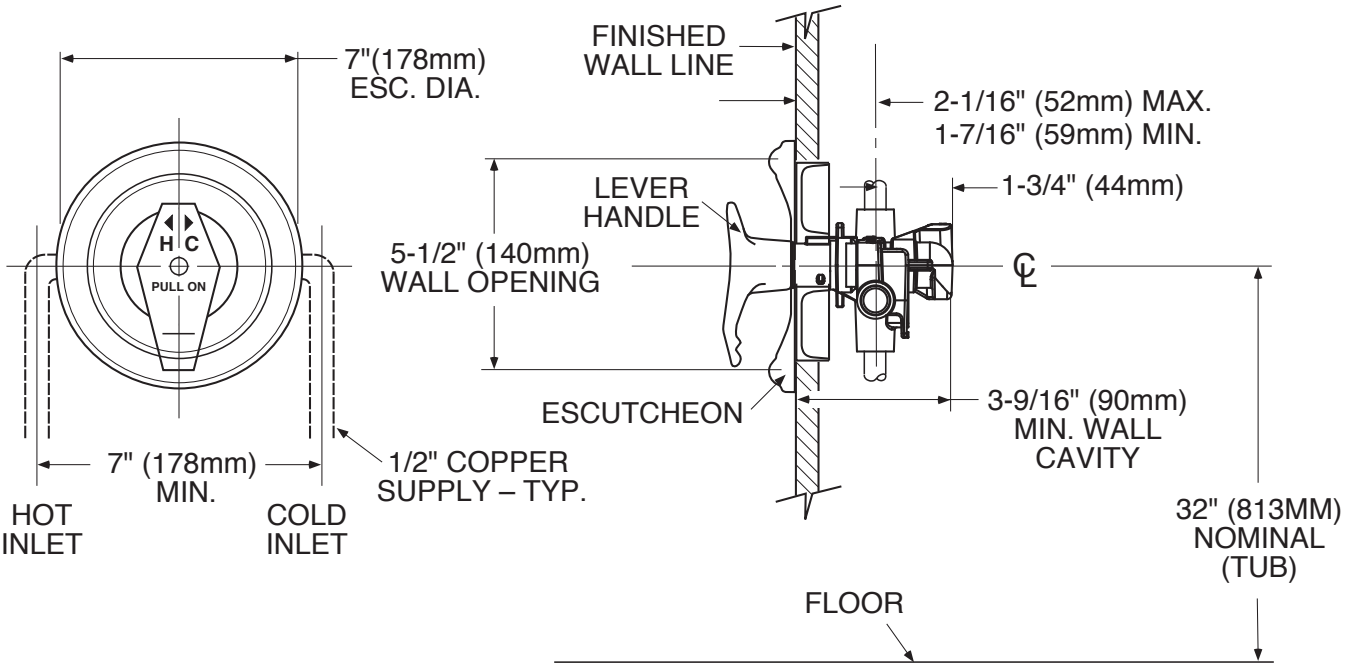


## CRITICAL DIMENSIONS

(DO NOT SCALE)



01-2520112 SPEC13059 3000013509 Released