




CTS CPVC Technical  
**CTS Product Dimensions**

**Female Adapter - Gasket Sealed Brass Thread Transition**


Socket x Gasket Fipt - Use NO Thread Sealant  
 NSF® Certified Lead Free

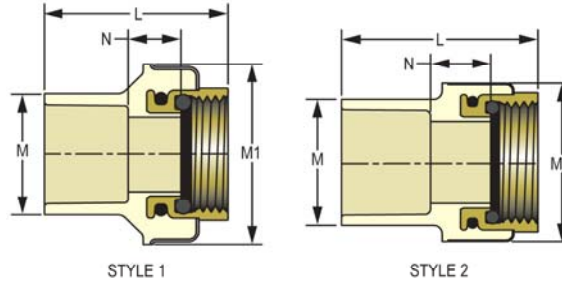

Part Number	Size	L	M	M1	N	Style	Approx. Wt. (Lbs.)
4135-005BRG	1/2	1- 1/2	27/32	1- 7/16	9/16	1	.11
4135-007BRG	3/4	1- 9/16	1- 3/32	1- 5/8	15/32	1	.20
4135-010BRG	1	2- 1/32	1-11/32	1-23/32	5/8	2	.21
4135-012BRG	1-1/4	2- 7/32	1-21/32	2- 1/16	19/32	2	.31
4135-015BRG	1-1/2	2- 7/16	1-15/16	2- 7/16	5/8	2	.42
4135-020BRG	2	2-27/32	2-17/32	3	19/32	2	.55

**Female Adapter - Reducing Gasket Sealed Brass Thread Transition**


Socket x Gasket Fipt - Use NO Thread Sealant  
 NSF® Certified Lead Free



Part Number	Size	L	M	M1	N	Approx. Wt. (Lbs.)
4135-101BRG	3/4X1/2	1- 9/16	1- 3/32	1- 7/16	7/16	.11
4135-130BRG	1X1/2	1- 3/4	1-11/32	1- 7/16	13/32	.12

**Female Adapter - CPVC Special Reinforced**

Socket x SR Fipt - Stainless Steel Collar  
 NSF® Certified Lead Free



Part Number	Size	L	M	M1	N	Approx. Wt. (Lbs.)
4135-005SR	1/2	1- 3/8	27/32	1- 7/32	1/8	.04
4135-007SR	3/4	1-9/16	1- 3/32	1- 3/8	1/8	.06
4135-010SR	1	1-15/16	1- 3/8	1-23/32	1/8	.10