


DuraStyle Two-piece toilet for SensoWash \$ # 216051..00 / 216051..85

|< 385 mm >|



Two-piece toilet for SensoWash®	Dimension	Weight	Order number
(without cistern), US-version, elongated with syphonic jet action, only in combination with SensoWash, 305 mm/12" rough-in, connecting elements for SensoWash with concealed connections included, vertical outlet	,		
Colors			
00 White Alpin 20 HygieneGlaze (an antibacterial ceramic glaze that provides almost indefinite effectiveness)			
Variant			
♦ 1,32/0,92 gpf (5/3,5 lpf), with dual flush piston valve, top flush	385 x 700 mm	41.700 kilogram	21605100
♦ 1,28 gpf (4,8 lpf), with Single Flush piston valve, top flush	385 x 700 mm	41.700 kilogram	21605185
Sanitary ceramics with the special WonderGliss surface finish wi time to come. When ordering WonderGliss please add a "1" as eleventh digit to		attractive-looking for a long	
Accessory			
Mounting set for One-piece and Two-piece toilets, 1/2", ASIA-version		0.480 kilogram	001416
Mounting set for One-piece and Two-piece toilets, Outflow 3/8" - external thread, Wall Connection 1/2" - internal thread, 1/2", US-version		0.480 kilogram	001417
Suitable products			
Cistern for bottom left supply, 390 x 170 mm	390 x 170 mm		093520

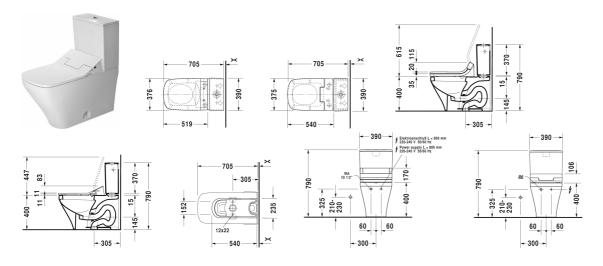

DuraStyle Two-piece toilet for SensoWash® # 216051..00 / 216051..85

|< 385 mm >|

SensoWash® Starck C shower toilet seat for DuraStyle* with concealed connections, Remote control included, Electromotive actuated seat and lid, Rear-, Lady- and Comfortwash, individual adjustment of water-, air- and seat temperature as well as spray wand position and water spray intensity, Self-cleaning spray wand, 2 individually programmable user profiles, Night light, Quick release: easy seat unit removal, on / off-button, 376 x 519 mm	376 x 519 mm	610200
SensoWash® Slim shower toilet seat for DuraStyle* with concealed connections, Remote control included, Self-cleaning spray wand, Locking function via remote control, Rear-, Lady-and Comfortwash, with soft closure, Night light, Seat and lid easy removable one-handed, Automatic drainage in periods of prologed disuse, on / off-button, 375 x 540 mm	375 x 540 mm	611200

All drawings contain the necessary measurements which are subject to standard tolerances. They are stated in mm and are non-binding. Exact measurements, in particular for customised installation scenarios, can only be taken from the finished ceramic piece.