


Happy D.2 Two-piece toilet Duravit Rimless for SensoWash® # 217451..00

|< 365 mm >|

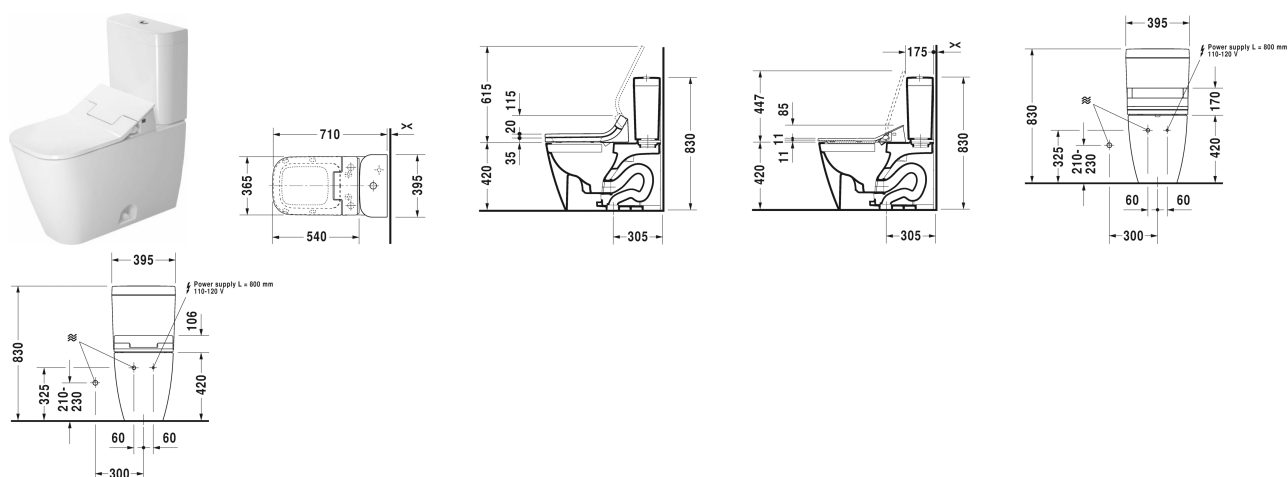

Two-piece toilet Duravit Rimless for SensoWash®	Dimension	Weight	Order number
(without cistern), connecting elements for SensoWash with concealed connections included, US-version, rimless, elongated with syphonic jet action, vertical outlet, 305 mm/12" rough-in, only in combination with SensoWash, 1,32/0,92 gpf (5/3,5 lpf)			
Colors			
00 White Alpin 20 HygieneGlaze (an antibacterial ceramic glaze that provides almost indefinite effectiveness)			
Variant			
🔹	365 x 710 mm	46.300 kilogram	217451..00
Sanitary ceramics with the special WonderGliss surface finish will remain clean and attractive-looking for a long time to come. When ordering WonderGliss please add a "1" as eleventh digit to the model number.			
Accessory			
Mounting set for One-piece and Two-piece toilets, Outflow 3/8" - external thread, Wall Connection 1/2" - internal thread, 1/2", US-version		0.480 kilogram	001431
Mounting set for One-piece and Two-piece toilets, 1/2", ASIA-version		0.480 kilogram	001418
Suitable products			

Happy D.2 Two-piece toilet Duravit Rimless for SensoWash® # 217451..00

|< 365 mm >|

SensoWash® Starck C shower toilet seat for Happy D.2* with concealed connections, Remote control included, Electromotive actuated seat and lid, Rear-, Lady- and Comfortwash, individual adjustment of water-, air- and seat temperature as well as spray wand position and water spray intensity, Self-cleaning spray wand, 2 individually programmable user profiles, Night light, Quick release: easy seat unit removal, on / off-button, 370 x 515 mm	370 x 515 mm	610300
SensoWash® Slim shower toilet seat for Happy D.2* with concealed connections, Remote control included, Locking function via remote control, Rear-, Lady- and Comfortwash, Individual adjustment of water temperature as well as spray wand position and water spray intensity, Self-cleaning spray wand, with soft closure, Night light, Seat and lid easy removable one-handed, Automatic drainage in periods of prologed disuse, on / off-button, 365 x 540 mm	365 x 540 mm	611300
Cistern with dual flush piston valve, top flush, for bottom left supply, 1,32/0,92 gpf (5/3,5 lpf), 395 x 170 mm	395 x 170 mm	093420

All drawings contain the necessary measurements which are subject to standard tolerances. They are stated in mm and are non-binding. Exact measurements, in particular for customised installation scenarios, can only be taken from the finished ceramic piece.