


## Starck 3 Toilet wall-mounted # 222659..92 / 222659..921

## |< 14 5/8" Inch >|



Toilet wall-mounted	Dimension	Weight	Order number
washdown model, cUPC listed, only in combination with SensoWash, connecting elements for SensoWash with concealed connections included, Durafix included			
Colors			
00 White 20 HygieneGlaze (an antibacterial ceramic glaze that provides almost indefinite effectiveness)			
Variant			
♦ 1.6/0.8 gpf	14 5/8" x 24 3/8" Inch	64 lb	22265992
♦ 1.6/0.8 gpf	14 5/8" x 24 3/8" Inch	64 lb	222659921
Infobox			
Durafix for concealed fixation is included			
Hardware for wall-mounted bidet and wall-mounted toilet	Ø 1/2" x 7 1/8" Inch	0.4 lb	006500
Noise reduction gasket for wall-mounted toilet		0.7 lb	005020
Geberit in-wall tank and carrier width 19 3/4", depth 5 1/2" height (adjustable) 43" - 47"	19 3/4" x 5 1/2" Inch	38 lb	111335

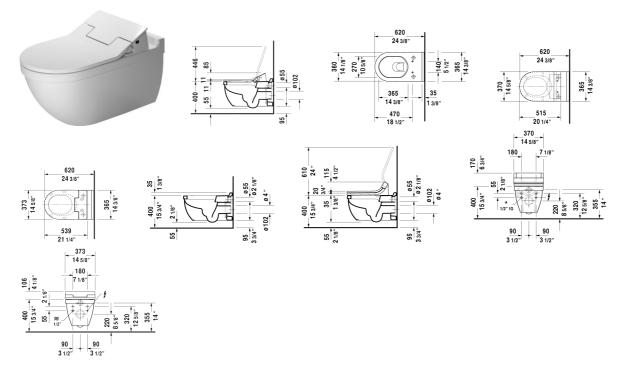

## **Starck 3 Toilet wall-mounted** # 222659..92 / 222659..921

Sigma 01 flush plate, dual flush White	9 5/8" x 6 1/2" Inch	115770
Pre-installation set in combination with SensoWash, for in-wal carrier with horizontal support without shower toilet pre-installation/condiut pipe	l	005072
Connecting set in combination with SensoWash		100691
Connecting set in combination with SensoWash, for Geberit Monolith sanitary modules for WCs		100692
Suitable products		
SensoWash Starck C shower-toilet seat with concealed connections, remote control included, power actuated lid and seat, rear-, front and oscillating wash, individual adjustment of water-, air- and seat surface temperature as well as nozzle position and jet strength, self-cleaning wand, 2 individually programmable user profiles, night light, Quick release: easy seat unit removal and attachment, on / off-button, cIAPMO®ELECTRICAL, 14 5/8" x 20 1/4" Inch	f 14 5/8" x 20 1/4" Inch	610001
SensoWash Slim shower-toilet seat with concealed connections remote control included, Locking function via remote control, rear-, front and oscillating wash, self-cleaning wand, with slow close, night light, Seat and lid easy removable one-handed, Automatic drainage in periods of prolonged disuse, on / off- button, cIAPMO®ELECTRICAL, 14 3/4" x 21 1/4" Inch		611000

All drawings contain the necessary measurements which are subject to standard tolerances. They are stated in inch & mm and are nonbinding. Exact measurements, in particular for customized installation scenarios, can only be taken from the finished ceramic piece.