

## DESCRIPTION

- Metal construction with various finishes identified by suffix
- Designed to be installed through 1, 4-3/4" diameter hole
- Single function handheld shower
- 59" double interlock spiral hose (metal)
- Includes integral dual check valves for backflow protection
- Includes lever or cross handle option in box

## OPERATION

- Pivot action lever or cross style handle
- Pull diverter to switch between faucet and handshower

## FLOW


- Faucet designed to deliver 6 gpm (22.7 L/min) at 45psi
- Handshowers designed to deliver 1.75 gpm (6.6 L/min) at 80psi

## STANDARDS

- Third party certified to: WaterSense®, ASME A112.18.1/CSA B125.1, and all applicable requirements referenced therein
- **ADA** ♿ for lever handle only


## WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original homeowner
  - 10 year limited warranty when used in a multifamily installation
  - 5 year limited warranty when used in a commercial installation
- Visit [www.moen.com/support](http://www.moen.com/support) for complete details and limitations

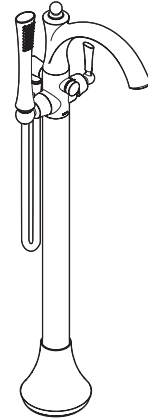

**WYNFORD™**  
Single Handle Single Riser Floor  
Mounted Tub Filler Faucet

**Models: 655 series**  
**Floor Mount Rough-In Kit:**  
TS50100 (Joist)  
TS50110 (Concrete)

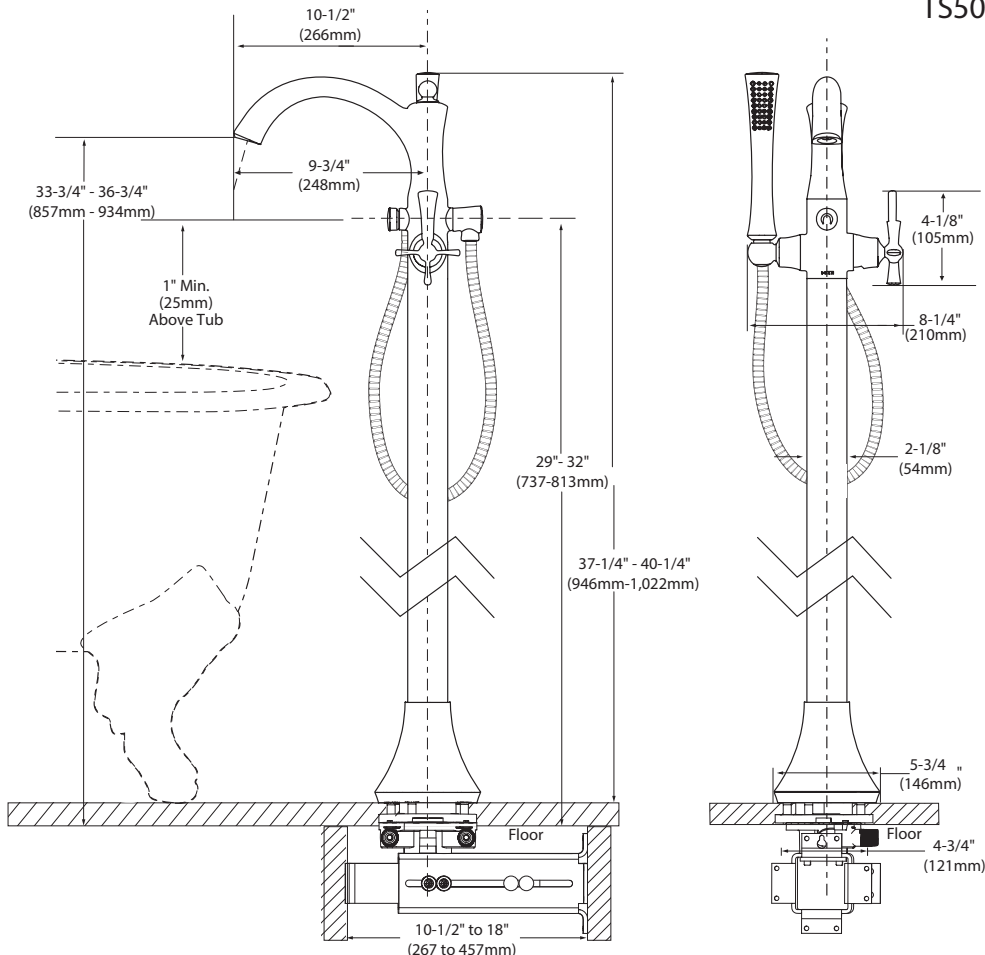

## CRITICAL DIMENSIONS

(DO NOT SCALE)