


NORITZ CONTINUES TO HAVE THE CONTRACTOR IN MIND WITH THIS NEW INNOVATIVE SERIES!

We now welcome the EZTR50 & EZTR75 to the EZTR Lineup!

EZTR SERIES

Available
May, 2017

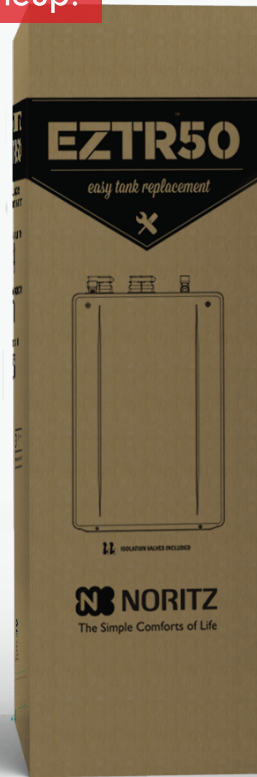

EASY

- **Top Water Connections** eliminates additional water piping
- **Direct Tank Replacement EZ Mounting** saves Time
- **2" Flex Vent**, allows you to run the venting through existing B-Vent
- **Everything you need in 1 BOX**

WHAT'S INCLUDED

- **EZ Heaters:**
EZ98DV for EZTR50, EZ111DV for EZTR75
EZTR50 for 50 Gal. Tank Replacement
EZTR75 for 75 Gal. Tank Replacement
- **Flex Vent Kit**
- **Flex Vent Conversion Kit**
- **Isolation Valve Kit**
- **Easy-to-Follow Start-Up Guide**

SPECIFICATIONS

- **Now Wi-Fi Capable** with use of **NORITZ CONNECT ADAPTER!**

Model Name	EZTR50	EZTR75
Gas Consumption	18,000 - 180,000 btuh	18,000 - 199,900 btuh
Max Flow Rate	9.8 GPM (7.6 GPM at 45°F ΔT)	11.1 GPM (8.7 GPM at 45°F ΔT)
Type	Vertical Termination Indoor (FSV)	
Venting	Installation	Power Vented
	Capability	2" Flexible PP
Venting	Max Lengths	25 Feet
	Unit Dimensions (Height) x (Width) x (Depth)	27.0" x 18.5" x 12.8"
Unit Weight	81 lbs.	
Box Dimensions (Height) x (Width) x (Depth)	65.0" x 22.8" x 17.6"	
Box Weight	120 lbs.	
Operating Pressure	15-150 psi	
Connection Sizes	Water Inlet	(Top Mount) 3/4"
	Hot Water Outlet	(Top Mount) 3/4"
	Gas Inlet	3/4" (1/2" Capable)
	Condensing Drain	1/2"
Materials	Flue Collar	PP
	Primary Heat Exchanger	Stainless Steel : 316L
	Secondary Heat Exchanger	Stainless Steel : 316L
Energy Factor	EF: 0.97 / UEF: 0.96	
Warranty	12 Year Heat Exchanger, 5 Year Parts, 1 Year Labor	
Temperature Settings	°F Mode:	100-140°F (In 5°F intervals)
	°C Mode:	37-48°C (In 1°C intervals), 50, 55, 60°C (In 5°C intervals)

