

**Specification: (example)**
**(FOR 1-1/2" BACK INLET CLOSET FIXTURE)**

- Quiet action, TECK® exposed diaphragm flush valve
- Chloramine resistant diaphragm
- Forged brass diaphragm retainer
- Renewable seat
- Polished chrome plated finish
- **External water conserving flush volume adjustment,** (except -48 and -6 models) factory set at 60 PSI to 6 litre (1.6 US gal.)
- Vandal resistant cover screw
- Metal "non hold open" handle
- **1" FIP/copper sweat inlet adaptor** angle check stop with protecting cap
- Adjustable 121mm (4-3/4") plus or minus 11mm (7/16") inlet/valve outlet centers
- Vacuum breaker
- Cover tube and SIS wall flange, spud flange and concealed spud nut


**81T271**
**81T271**

As above

**81T271-1**

Same as 81T271 but with trap seal primer tee

**81T271-5**

Same as 81T271 but with center cover bumper

**81T271-6**

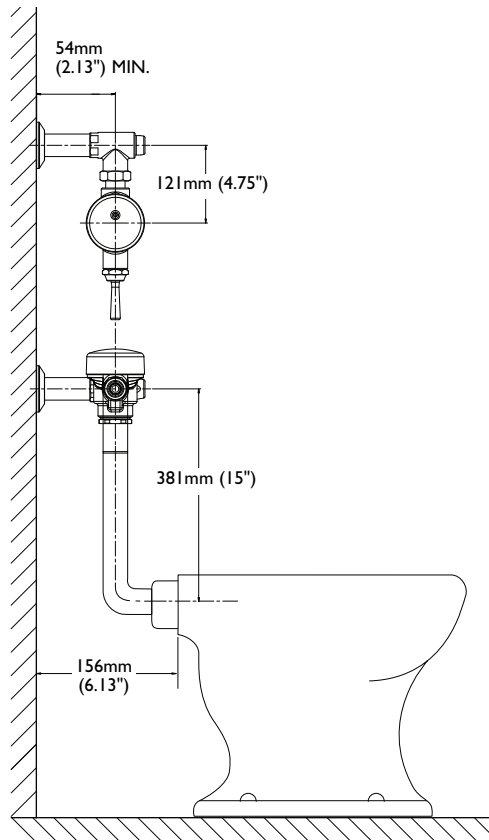
 Same as 81T271, but **Not Field Adjustable**
**81T271-48**

Same as 81T271, but factory set at 60 PSI to 4.8 litre (1.27 US gal.),

**Not Field Adjustable**
**81T271-56**

 Same as 81T271-5, but **Not Field Adjustable**
**81T271-548**

Same as 81T271-5, but factory set at 60 PSI to 4.8 litre (1.27 US gal.),

**Not Field Adjustable**

**Approvals:**

- CSA certified
- Complies to ASSE 1037
- ADA compliant and meets Handicapped Accessibility Standard ASME A117.1 of less than 5 lbs. operating force.

- IAPMO Listed

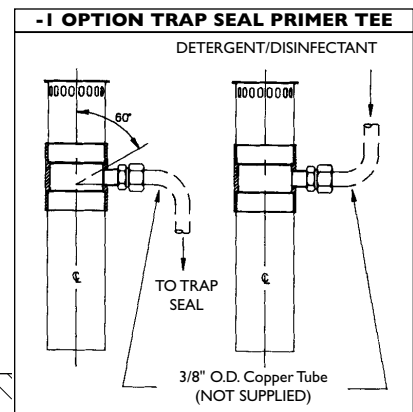
(Contact Delta Representative for State and/or Local Approvals.)

**Engineer/Architect Approval**

Model Specified:

Approval:

Date:

 Note: Measurements may vary  $\pm 6\text{mm}$  (0.25")


Note: For high and low pressure applications, please see page FEA-81T High Water Pressure note for more details.

Verify flow requirements with bowl manufacturer.