


- GT529-SMB Finish(B) ☐
- GT529-SMC Finish(C) ☐
- GT529-SMD Finish(D) ☐
- GT529-SMS Finish(S) ☐
- GT529-SMBG Finish(BG) ☐

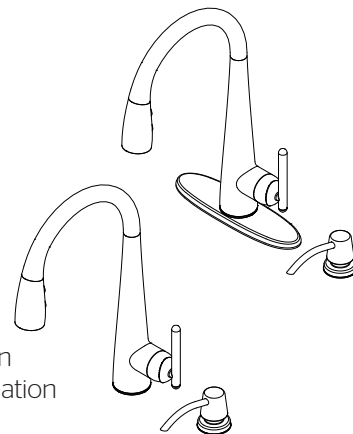

- All Metal Construction
- 1, 2, 3 or 4-Hole Installation
- Pforever Seal

Specifications

Features

- 1.8 GPM Flow Rate
- Convert to LEED Requirements with Separate Insert: Low Flow Regulator 941-786: 1.5 GPM
- 3 Function Pull-Down Sprayer (Stream, Spray, and Pause)
- All Metal Construction
- Includes Optional Deckplate
- Includes Metal Soap Dispenser
- Self Cleaning Spray Head
- Pforever Seal™ Ceramic Disc Valve
- Limited Lifetime Warranty




Code Compliance

Pfister products are designed and manufactured in compliance with the following standards and codes:

- IAPMO Certified to ASME A112.18.1/CSA B125.1 including:
 - ASME A112.18.3 (Backflow Prevention)
- NSF/ANSI/CAN61:Q≤1
- CEC Certified/CALGreen compliant
- ADA Compliant - ANSI A117.1 (Lever Handle Only)




Dimensions

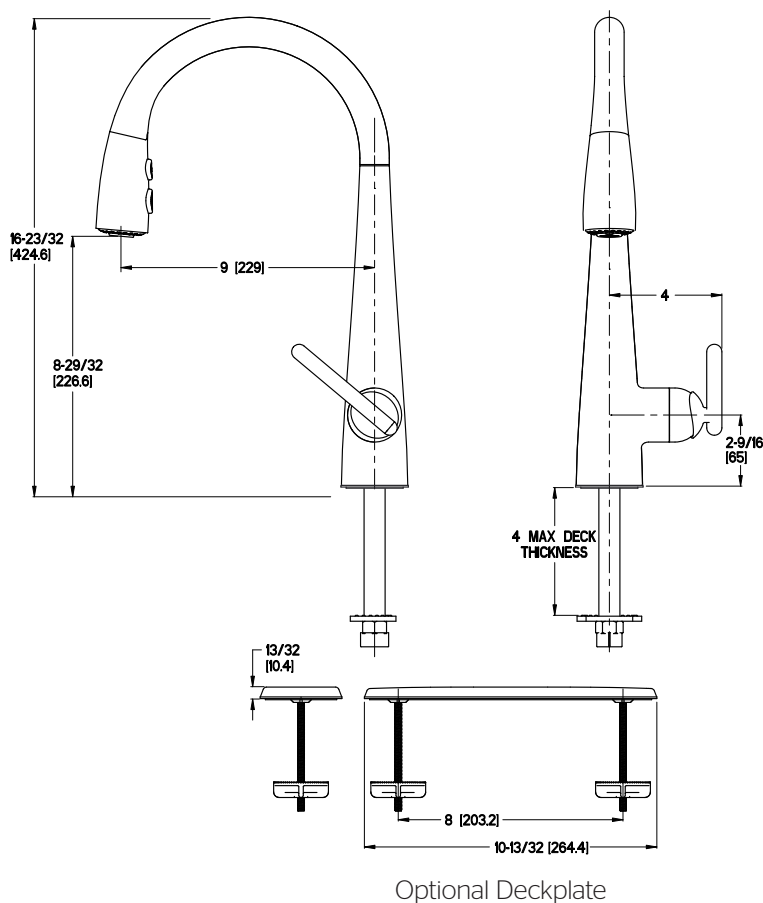

Ø1-3/8 Min to Ø1-1/2 Max. Deck Hole Openings

Top Filling Soap Dispenser

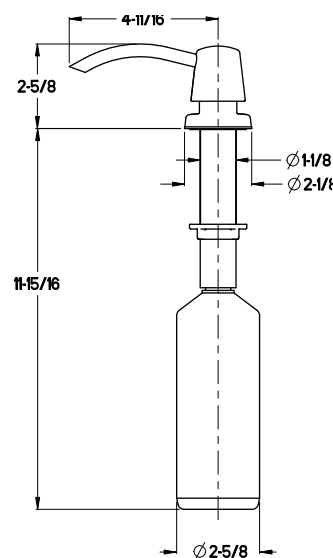

36 Inch Supply Lines with 3/8 Female Compression Brass Connections

