



# WIRELESS REFRIGERATION PROBES

## View All Indoor and Outdoor AC/R System Parameters from One Location

Wireless Vacuum Gauge Probe

Target Superheat Calculation

Pressure Probes w/ 180° Articulation

Refrigerant Pass Through Port

Wireless Pipe Clamps



**HUB8** UPC: 053533508598

*Smart Refrigeration Probes Deluxe Kit w/ Vacuum Gauge*

**HUB6** UPC: 053533508246

*Smart Refrigerant Complete Kit*

- In App temperature split and psychrometric calculations
- In App system refrigerant charging calculations
- Pass thru refrigerant ports for easily adding or recovering refrigerant from the system
- 180 degree rotation for easy use in cramped spaces
- 1-Year limited warranty



**WVG2** UPC: 053533508604

*Wireless Vacuum Gauge Probe*

- Vacuum Range: 2000 microns
- 700 PSI (36200446.8716772 microns) Maximum Over Range
- Temperature Range: 10 to 122 °F
- Easy to use vacuum gauge probe
- 1-Year limited warranty



**HUB4** UPC: 053533508239

*Smart Refrigerant Charging Kit*

- In App system refrigerant charging calculations
- Pass through refrigerant ports for easily adding or recovering refrigerant from the system
- 180 degrees rotation for easy use in cramped spaces
- Pressure range: 0 to 725 psig
- 1-Year limited warranty



**WOT2** UPC: 053533508611

*Wireless Outside Temperature Probe*

- Temperature Range: 32° to 180°F
- Works in two positions
- Real time target superheat calculation (With WHP1)
- Calculate Real Time Target Superheat (requires a WHP1 & the HUB App)
- 1-Year limited warranty



## UEi HUB




### Measurement & Calculations

- Liquid and Suction line pressures, temperatures, saturations and outdoor dry bulb
- Superheat, subcooling and target superheat
- Delta and target delta temperatures
- Air Return and supply relative humidity, dry bulb, wet bulb, dew point and enthalpy
- Vacuum & deepest vacuum
- Evacuation and rise Limit target, timer
- H2O saturation point indication
- Selectable units of measure
- High altitude compensation
- 118 refrigerants list and favorites menu


### Vacuum Screen

Dual Mode Vacuum screen for Evacuation and Rise Tests.  
Allows you to easily set Evacuation and Rise Tests values and timer.

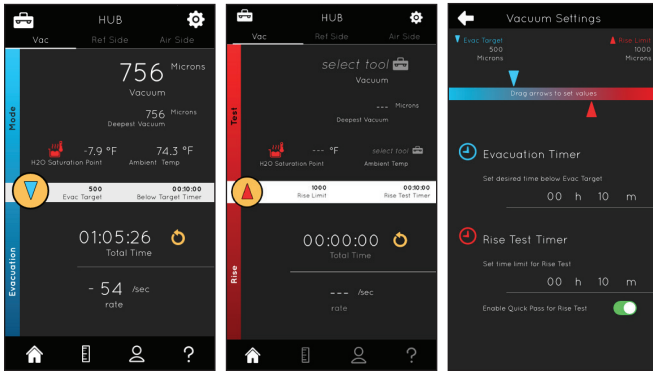


### Quick Connections

Easily assign where probes are used on system.

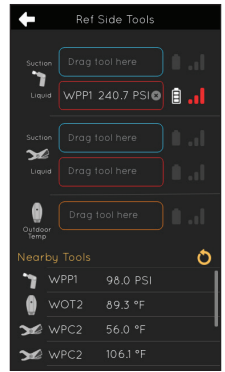


### Refrigeration Screen

View Refrigerant values and *real-time target superheat*.  
Select from list of 57 refrigerants and save most used types.

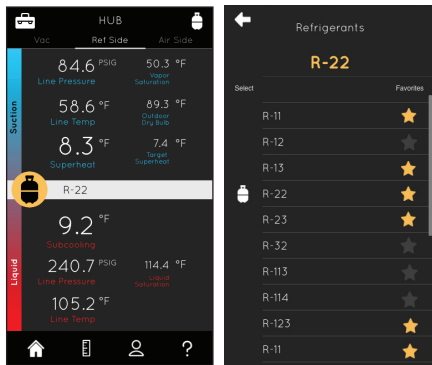

### Air Side Screen

Air Side screen displays return & supply measurements  
allowing users to view additional calculations.

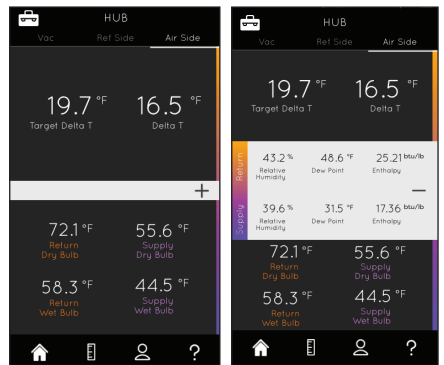

Requires compatible mobile device  
Android™ 5+, iOS® 10+ or iPadOS™ 10+

HUB is compatible with measureQuick® (except WVG2 wireless vacuum gauge)