





FUEL TYPE:

Wood

US AND CANADA

Why Choose Double Wall Stove Pipe?

Double Wall Stove Pipe was designed to work with your Stainless Steel Chimney to form a complete Wood Stove Venting system!

Double Wall Stove Pipe is a superior product in a number of ways:

- Clearances are reduced to 6" from combustibles (vs. 18" for single wall pipe)
- It lasts significantly longer
- High quality, scratch resistant black finish
- Adjustable lengths mean no cutting pipe to fit your installation
- Listed, Certified, and Labeled to UL Safety Standards
- Lifetime Warranty on all components

DOUBLE WALL vs SINGLE WALL STOVE PIPE								
Product	Tested & Labeled	Material	Clearances to Combustibles	Warranty				
Model DSP Double Wall Stove Pipe	To ULC S641 / UL 103	Heavy Guage Stainless Steel / Aluminized Steel	6"	Lifetime Warranty				
Single Wall Stove Pipe	Not Tested or Labeled	Light Gauge Carbon Steel 18"		No Warranty*				

* If a wood burning appliance is used every day in the heating season, surveys have shown that a single wall stove pipe will need replacement every two or three years.

Use what a Pro uses - Double Wall Stove Pipe!



Model DSP Double Wall Stove Pipe is a connector pipe that links your wood stove to an insulated chimney. The connector is an important component of a wood burning system because its correct size, arrangement and installation improve the performance and safety of the heating system. Listed & Tested to ULC S641 and UL 103 Standards, **Model DSP** has an attractive outer black surface made of durable aluminized steel to withstand temperatures up to 1200°F in continuous operation.

DOUBLE WALL DESIGN ADVANTAGES

 Better Insulating Value = Superior Stove Performance Double Wall construction with a ¼" air space between inner and outer pipes provides a superior insulating value than single wall pipe. Better insulating value keeps flue gas temperatures higher. This helps your Wood Stove perform with an enhanced draft, which provides: Less chance of moisture or soot build-up within the vent Reduced "smoking" of the Stove at start-up Increase efficiency Less creosote build-up 	Superior Performance = Reduced Clearances (from 18" to ONLY 6") Double Wall Stove Pipe not only keeps the flue temperatures higher, it also keeps the outer pipe temperatures cooler. This allows Double Wall Stove Pipe to be installed with only 6" of clearance to combustible materials. Single Wall Stove Pipe requires an 18" clearance, which typically means your Wood Stove sits further away from the wall and takes up valuable space within the room.
Quality = Longer Life	Advanced Design = Easy Installation
The premium materials used to construct Model	Model DSP is available in a variety of lengths
DSP enables the manufacturer to offer a Lifetime	and elbows for ease of installation. Telescopic
Warranty. Single Wall Stove Pipe is made	and Adjustable Lengths are available to eliminate
from simple carbon steel and typically needs	cutting-to-size and allows access to the system for
replacement every 2 or 3 years.	cleaning and inspection.
Stainless Steel = Quality	Premium Paint Finish = Greater Value
The inner liner of Model DSP is made from	The black finish of Model DSP provides a very
corrosion resistant 400 series Stainless Steel.	rich and distinguished appearance. Black enamel
Together with the Stainless Steel Insulated	paint is used to provide a long lasting, brighter
Chimney this combination forms an all-Stainless	finish that also resists scratches. The black enamel
Steel system to help your Wood Stove perform	finish can also be touched up with "Thermolux
safely and efficiently. Double Wall Stove Pipe is	270 Low Sheen Black" or "Stove Bright 1990
listed to ULC S641 and UL 103 Standards - your	Satin Black" paint in the event that the finish does
guarantee of safety.	get scratched.

THE BEST WARRANTY IN THE INDUSTRY

Model DSP Double Wall Stove Pipe features an advanced engineering design and premium materials which allow us to offer a Lifetime Warranty. See written warranty for details.

FIXED LENGTHS



- Available in Lengths of 6", 12", 24" and 36".
- 3 metal screws supplied with each Length.
- For Installed Length, subtract 1-3/8" per joint.

DIA.	LENGTH	DIMENSI	DNS			CODE	NO.
		Α	В	C	D		
6"	6"	6"	6-1/2"	5-29/32"	6"	266006	DSP6P6-1
7"	6"	7"	7-1/2"	6-29/32"	6"	267006	DSP7P6-1
8"	6"	8"	8-1/2"	7-29/32"	6"	268006	DSP8P6-1
6"	12"	6"	6-1/2"	5-29/32"	12"	266012	DSP6P12-1
7"	12"	7"	7-1/2"	6-29/32"	12"	267012	DSP7P12-1
8"	12"	8"	8-1/2"	7-29/32"	12"	268012	DSP8P12-1
6"	24"	6"	6-1/2"	5-29/32"	24"	266024	DSP6P24-1
7"	24"	7"	7-1/2"	6-29/32"	24"	267024	DSP7P24-1
8"	24"	8"	8-1/2"	7-29/32"	24"	268024	DSP8P24-1
6"	36"	6"	6-1/2"	5-29/32"	36"	266036	DSP6P36-1
7"	36"	7"	7-1/2"	6-29/32"	36"	267036	DSP7P36-1
8"	36"	8"	8-1/2"	7-29/32"	36"	268036	DSP8P36-1

ADJUSTABLE LENGTHS



- Includes Finishing Band.
- Adjustable from 12" to 18".
- Used to adjust pipe to desired length.
- Eliminates the need to cut pipe.
- For Installed Length, subtract 1-3/8" per joint.

DIA.	DIMENS	SIONS			PRODUCT CODE	PART NO.
	Α	В	C	D		
6"	6"	6-1/2"	5-29/32"	6-13/32"	266086	DSP6AL-1
7"	7"	7-1/2"	6-29/32"	7-13/32"	267086	DSP7AL-1
8"	8"	8-1/2"	7-29/32"	8-13/32"	268086	DSP8AL-1

TELESCOPIC LENGTHS



- Includes Finishing Band.
- Adjustable from 38" to 68".
- Easily removable for inspection and cleaning.
- Eliminates the need to cut pipe.
- For Installed Length, subtract 1-3/8" per joint.

DIA.	DIMENS	IONS			PRODUCT CODE	PART NO.
	Α	В	C	D		
6"	6"	6-1/2"	5-29/32"	6-13/32"	266084	DSP6TL
7"	7"	7-1/2"	6-29/32"	7-13/32"	267084	DSP7TL
8"	8"	8-1/2"	7-29/32"	8-13/32"	268084	DSP8TL

Parts and Accessories


STOVE ADAPTOR



- May be required to adapt some stove flue outlets to Double Wall Stove Pipe.

DIA.	DIMENS	IONS				PRODUCT CODE	PART NO.
	Α	В	C	D	E	Selkirk U.S.A.	Selkirk Canada
6"	6"	6-1/2"	5-29/32"	7"	5-3/4"	266243	DSP6SA-1
7"	7"	7-1/2"	6-29/32"	8"	5-3/4"	267243	DSP7SA-1
8"	8"	8-1/2"	7-29/32"	9"	5-3/4"	268243	DSP8SA-1

UNIVERSAL CHIMNEY ADAPTOR



- Required for adapting Double Wall Stove Pipe to some insulated chimney systems.

DIA	. DIMENSI	DNS		PRODUCT CODE	PART NO.
	Α	В	C	Selkirk U.S.A.	Selkirk Canada
6"	6-1/2"	6-1/8"	7"	266244	DSP6CA
7"	7-1/2"	7-1/8"	7"	267244	DSP7CA
8"	8-1/2"	8-1/8"	7"	268244	DSP8CA

OVAL TO ROUND ADAPTOR



- Used to convert 8" Oval Flue outlets to 8" Round DSP.
- Crimped ends for easy connection.
- Secure with 3 screws.

DIA.	DIMENSION	3			PRODUCT CODE	PART NO.
	Α	В	C	D	Selkirk U.S.A.	Selkirk Canada
8"	8-1/2"	9-1/4" x 6-1/2"	12-7/8"	13-7/8"	268250	DSP80TR

FLUSH STOVE ADAPTOR



- Used to adapt Double Wall Stove Pipe to stoves with recessed flue outlets.
- Stainless Steel inner liner extends past stove top to make a secure connection.

DIA.	DIMENSI	DNS			PRODUCT CODE	PART NO.
	Α	В	C	D	Selkirk U.S.A.	Selkirk Canada
6"	6-1/2"	6-1/2"	7"	5-1/2"	266249	DSP6FSA-1
7"	7-1/2"	7-1/2"	7"	5-1/2"	267249	DSP7FSA-1
8"	8-1/2"	8-1/2"	7"	5-1/2"	268249	DSP8FSA-1

MASONRY ADAPTOR

- For installations through a masonry wall.
- Used to connect Double Wall Stove Pipe to an existing masonry chimney or a relined masonry chimney with stainless steel liner.

DIA.	DIMENS	IONS			PRODUCT CODE	PART NO.
	Α	В	C	D	Selkirk U.S.A.	Selkirk Canada
6"	6"	6-1/2"	10"	11-3/4"	266247	DSP6MA
7"	7"	7-1/2"	11"	11-3/4"	267247	DSP7MA
8"	8"	8-1/2"	12"	11-3/4"	268247	DSP8MA


1.800.992.VENT (8368)

Parts and Accessories

MODEL IWT INSULATED WALL THIMBLE



- For installation to a masonry Chimney through a combustible wall.
- Used to connect a single or Double Wall Stove Pipe to an existing masonry chimney or a relined masonry chimney with stainless steel liner.

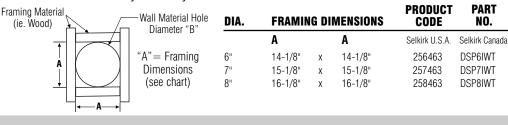

DAMPER KIT



- Allows the operator to alter the amount of air drawn through the venting system, controlling the stove's combustion.
- Must be installed directly on the stove's flue outlet where applicable.
- When handle is in horizontal position, the damper is "closed" (reducing combustion).
- The "closed" position is still 20% open, so the venting system is not completely blocked.
- When handle is in vertical position, the damper is wide open (no reduction of combustion).

DIA.	DIMENSIO	NS		PRODUCT PART Code No.
	Α	В	C	Selkirk U.S.A. Selkirk Canada
6"	5-29/32"	6-1/2"	5-3/4"	266260 DSP6DK-1
7"	6-29/32"	7-1/2"	5-3/4"	267260 DSP7DK-1
8"	7-29/32"	8-1/2"	5-3/4"	268260 DSP8DK-1

INCREASER



- Used to increase the size of the pipe to the chimney.

DIMENS	IONS	PRODUCT CODE	PART NO.			
Α	В	C	D	E	Selkirk U.S.A.	Selkirk Canada
6"	6-1/2"	4-29/32"	6-1/2"	9-5/8"	265306	DSPI56
7"	7-1/2"	5-29/32"	6-1/2"	9-5/8"	266307	DSPI67
8"	8-1/2"	6-29/32"	7-1/2"	11-5/8"	267308	DSPI78
8"	8-1/2"	5-29/32"	6-1/2"	9-5/8"	266308	DSPI68
	A 6" 7" 8"	7" 7-1/2" 8" 8-1/2"	A B C 6" 6-1/2" 4-29/32" 7" 7-1/2" 5-29/32" 8" 8-1/2" 6-29/32"	A B C D 6" 6-1/2" 4-29/32" 6-1/2" 7" 7-1/2" 5-29/32" 6-1/2" 8" 8-1/2" 6-29/32" 7-1/2"	A B C D E 6" 6-1/2" 4-29/32" 6-1/2" 9-5/8" 7" 7-1/2" 5-29/32" 6-1/2" 9-5/8" 8" 8-1/2" 6-29/32" 7-1/2" 11-5/8"	DIMENSIONS CODE A B C D E Selkirk U.S.A. 6" 6-1/2" 4-29/32" 6-1/2" 9-5/8" 265306 7" 7-1/2" 5-29/32" 6-1/2" 9-5/8" 266307 8" 8-1/2" 6-29/32" 7-1/2" 11-5/8" 267308

REDUCER



- Used to reduce the size of the pipe to the chimney.

DIA.	DIMENS	IONS	PRODUCT CODE	PART NO.			
	Α	В	C	D	E	Selkirk U.S.A.	Selkirk Canada
7" to 6"	6"	6-1/2"	6-29/32"	7-1/2"	9-5/8"	267366	DSPR76
8" to 7"	7"	7-1/2"	7-29/32"	8-1/2"	9-5/8"	268367	DSPR87
8" to 6"	6"	6-1/2"	7-29/32"	8-1/2"	11-5/8"	268366	DSPR86

FINISHING BAND (Universal)

All



- Used to conceal the crimped end on the last length in the system. **DIA. DIMENSIONS**



90 DEGREE ELBOW



- Used to offset Double Wall Stove Pipe toward insulated chimney in a through-the-wall installation.
- Non-positional connection system allows 360° rotation.

DIA.	DIMENS	IONS	PRODUCT CODE	PART NO.			
	Α	В	C	D	E	Selkirk U.S.A.	Selkirk Canada
6"	6"	6-1/2"	5-29/32"	6-1/2"	9"	266230	DSP6E9-1
7"	7"	7-1/2"	6-29/32"	7-1/2"	9"	267230	DSP7E9-1
8"	8"	8-1/2"	7-29/32"	8-1/2"	9"	268230	DSP8E9-1

45 DEGREE ELBOW

- Used to offset Double Wall Stove Pipe toward insulated chimney.
- Non-positional connection system allows 360° rotation.

DIA.	DIMENS	IONS	PRODUCT CODE	PART NO.			
	Α	В	C	D	E	Selkirk U.S.A.	Selkirk Canada
6"	6"	6-1/2"	5-29/32"	6-1/2"	6"	266215	DSP6E4-1
7"	7"	7-1/2"	6-29/32"	7-1/2"	7"	267215	DSP7E4-1
8"	8"	8-1/2"	7-29/32"	8-1/2"	8"	268215	DSP8E4-1





- Includes Cap.

 Used in conjunction with a vertical insulated chimney to provide easy access for inspection and cleaning.

DIA.	DIMENS	IONS	PRODUCT CODE	PART NO.			
	Α	В	C	D	E	Selkirk U.S.A.	Selkirk Canada
6"	6"	6-1/2"	5-29/32"	13-3/4"	6"	266100	DSP6TE-1
7"	7"	7-1/2"	6-29/32"	14-3/4"	6-1/2"	267100	DSP7TE-1
8"	8"	8-1/2"	7-29/32"	15-3/4"	7"	268100	DSP8TE-1

VERTICAL INSTALLATION KIT - U.S.A. ONLY

- Includes everything you need for most Ceiling supported installations with Ultra-Temp and Galva-Temp Chimney.

- Kit includes:

- Ultra-Temp and Galva Temp Chimney Adapter (T-CPA)
- DSP Finishing Band (Universal) (266261)
- •DSP Telescopic Length (DSP-TL)

DIA.	PRODUCT CODE	PART No.		
	Selkirk U.S.A.	Selkirk Canada		
6"	266610	DSP6VK		
8"	268610	DSP8VK		



1.800.992.VENT (8368)

Model DSP Offset Chart


This chart has three columns for elbow angle required to achieve your desired offset. The first column ("Offset") represents the horizontal measurement, at the stove pipe centre line and the distance you want to offset. The second column ("height") is the height of the assembled offset elbow to the top of the return elbow. Column three shows the appropriate lengths required.

- 1. Determine the distance of the offset required.
- 2. On the chart, find the predetermined distance required for the 45 degree elbow under the corresponding chimney diameter.
- 3. After finding the offset, follow across the chart to find the specified height and appropriate chimney lengths required under their corresponding diameters.

OFFSET			HEIGHT		LENGTH	LENGTHS REQUIRED BETWEEN ELBOWS					
6" Dia.	7" Dia.	8" Dia.	6" Dia.	7" Dia.	8" Dia.	6"	12"	AL	24"	36"	TL
6"	6-3/4""	6"	13 7/8"	14-1/2"	14-1/8"						
9-1/2"	9-3/4"	9-1/4"	17"	17-3/4"	17-1/4"	1					
13-1/2"	13-3/4"	13-1/4"	21-1/8"	22-1/8"	21-3/4"		1				
16-3/4"	16-3/4"	15-5/8"	24-5/8"	25-1/2"	25-3/4"	1	1				
17-1/4"	17-3/4"	17-1/2"	25-3/4"	26-1/4"	25-7/8"			1			
22-3/4"	22"	21-1/2"	29-1/4"	30-1/4"	30-7/8"				1		
25-1/2"	25-1/4"	24"	31-1/2"	33-3/4"	34"		1	1			
29-1/8"	31-1/4"	30-3/4"	38-3/4"	37-3/4"	38-3/4"					1	
32-3/8"	31-3/4"	32"	40-1/8"	42-1/2"	41-3/4"	1	1		1		
59-3/4"	51"	54-1/2"	60-1/4"	60-1/4"	60"						1

OFFSET

HEIGHT

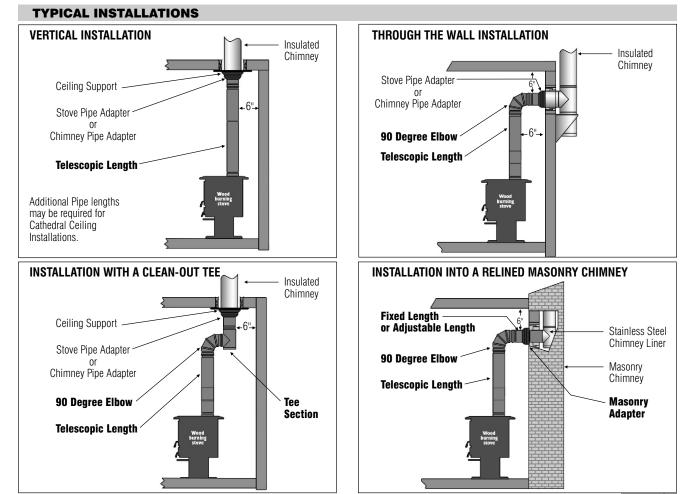

KSELKIRK



For training, detailed product information, downloadable catalogs and installation instructions visit our website:

selkirkcorp.com



从SELKIRK Selkirk Corporation 5030 Corporate Exchange Blvd. Grand Rapids, MI 49512

phone: 1.800.992.VENT (8368) email: info@selkirkcorp.com

selkirkcorp.ca



人SELKIRK Selkirk Canada Corporation 950 South Service Road Second Floor Stoney Creek, ON L8E 6A2

phone: 1.888.SELKIRK (735.5475) email: cscanada@selkirkcorp.com

Complete Linecard





roof curbs &

equipment

rails



doors



rooftop products*

residential vent

......









components

grilles, registers, diffusers

commercial industrial vent