

YORKVILLE™ 16-1/8" ELONGATED PRESSURE-ASSISTED TOILET

VITREOUS CHINA

YORKVILLE™ 16-1/8" ELONGATED PRESSURE-ASSISTED TOILET

❑ 2325.101

- Vitreous china
- Low-consumption (6.0 Lpf/1.6 gpf)
- **Floor-mounted, back-outlet toilet**
- Elongated 16-1/8" high bowl
- Pressure-assisted siphon jet flush action
- Side-mounted chrome trip lever
- Close-coupled flushometer tank*
- Speed Connect® tank/bowl coupling system
- 4 bolt caps
- Fully glazed 2" ballpass trapway
- 10" x 12" water surface area
- 100% factory flush tested

❑ 3125.016 Elongated 16-1/8" high bowl with four bolt caps and two floor screws

❑ 4099.100 Flushometer tank complete with coupling components

Component parts:

❑ 735084-400 Tank cover (specify color)

Nominal Dimensions:

819 x 495 x 803mm
(32-1/4" x 19-1/2" x 31-5/8")

Alternate Configurations:

❑ 4099.700 Tank and tank cover only with tank cover locking device

❑ 4099.800 Tank and tank cover only with right hand trip lever

Fixture only, seat and supply by others

Recommended working pressure range 20 psi - 80ps

Compliance Certifications -

Meets or Exceeds the Following Specifications:


- ASME A112.19.2 for Vitreous China Fixtures

To Be Specified:

- ❑ Color: ☐ White ☐ Bone ☐ Linen
☐ Silver ☐ Fawn Beige ☐ Black
- ❑ Seat: American Standard #5324.019
Elongated "Rise and Shine" (with easy to clean
lift-off hinge system) solid plastic closed front
seat with cover.
- ❑ Seat: American Standard #5325.024
Elongated "Rise and Shine" (with easy to clean
lift-off hinge system) solid plastic open front
seat with cover.
- ❑ Alternate Seat:
- ❑ Supply with Stop:



Replaces 2325.100

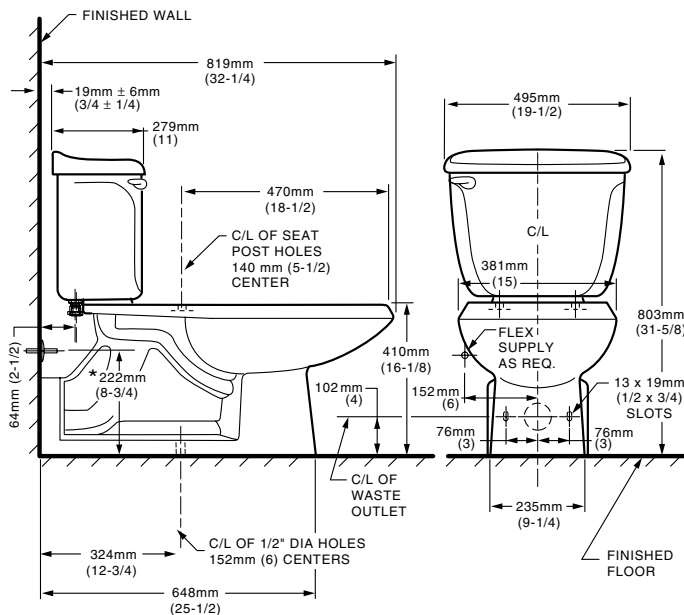

NOTES:

WASTE OUTLET SEAL RING MUST BE NEOPRENE OR GRAPHITE-FELT (WAX RING NOT RECOMMENDED).
SUPPLY NOT INCLUDED WITH FIXTURE AND MUST BE ORDERED SEPARATELY.

* DIMENSION SHOWN FOR LOCATION OF SUPPLY IS SUGGESTED.
FOR ADDITIONAL INFORMATION REFER TO INSTALLATION INSTRUCTIONS SUPPLIED.

IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerances established by ANSI Standard A112.19.2. These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.



**MEETS THE AMERICANS WITH DISABILITIES ACT GUIDELINES AND
ANSI A117.1 REQUIREMENTS FOR ACCESSIBLE AND USABLE
BUILDING FACILITIES-CHECK LOCAL CODES.**

* Flushmate III tank system by Flushmate® Div. of Sloan Valve Co