

TH135-01

Hydronic floor heating
Central heating

**This easy-to-use electronic thermostat
saves three temperature settings
and features pump protection**

MODEL & RATINGS

TH135-01 2 A (inductive) @ 24 V R, W
Millivolt compatible



NON-PROGRAMMABLE

SPECIFICATIONS

TEMPERATURE CONTROL

Proportional adaptive

Cycles: selectable 15 or 20 minutes

Conventional with anticipation

Accuracy: $\pm 0.5^{\circ}\text{C}$ / 0.9°F

TEMPERATURE SETTING

Manual

$^{\circ}\text{C}$ or $^{\circ}\text{F}$ selectable

Heating setting range: 5°C to 30°C (40°F to 85°F)

POWER SUPPLY

2 AA batteries

DIMENSIONS (H•W•D)

79 x 79 x 22 mm / 3.1 x 3.1 x 0.8 inches

FEATURES

Selectable temperature control – gives thermostat flexibility to control a range of heating applications

Comfort, economy and vacation presets enable temperature changes at the touch of a button

Pump protection activates pump for one minute every 24 hours to prevent seizure

Compact design – one of the smallest thermostats on the market

Precise LCD shows room temperature in increments of 0.1°C or 0.1°F

Low battery indicator – gives 60-day warning to replace batteries

Remote input enables change of temperature modes by phone (telephone controller required)

Compatible with electric heat applications using a relay (see accessories)

ACCESSORIES


Aube AC130-12 wall plate

Aube CT240 telephone controller

Aube RC840 electromechanical relay

Aube RC840T Series electromechanical relay

INSTALLATION

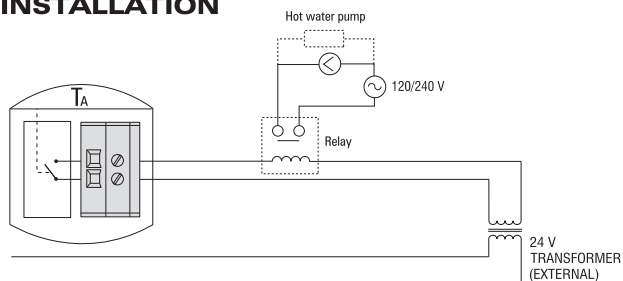

3 year
warranty