


Comparison of Efficiency

- Note:**
1. The test results depend to a great extent on the hardness of the material, etc.
 2. Numbers in the charts below are relative values when the capacities of Competitor "H" model are indexed at 100.
 3. Chipped concrete in vertical down application using $\varnothing 1.5\text{mm}$ x 50m cord reel, and measured the amount of concrete removed.


Test material:
Concrete with compressive strength of 40N/m^2

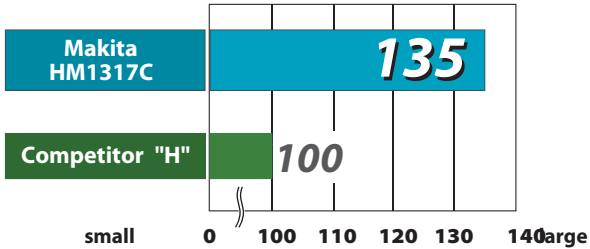

See the Result of AVT

Comparison of Vibration level* and Time to reach ELV (Exposure Limit of Vibration)**

*It is known as the tri-axial value and value at Directive of A(8).
**It means the maximum amount of vibration that an operator may be exposed to on any single day.

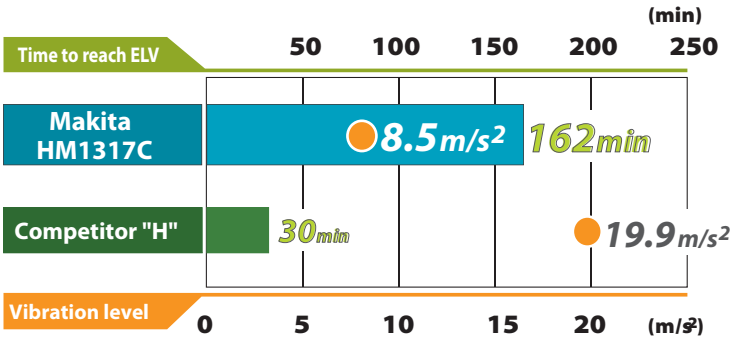

1-1/8" HEX SHANK DEMOLITION BITS			
	Size	Part No.	For Models
	Bull Point - For demolishing		
	16" Self-Sharpening	B-45559	
	20"	751420-A	
	Flat Chisel - For breaking away large chunks of concrete, chipping, channeling		
	15/16" X 20"	751220-A	
	Scaling Chisel - Wide chisel for chipping away scale or dried concrete splatter		
	3" X 20"	751221-A	
	Clay Spade - For digging in clay, shale and more		
	5-1/2" X 23-1/2"	751622-A	
	Tampers Shank - For tamping operations (use with corresponding Plate)		
	15" Long	751103-A	
	Tampers Plate		
	6" x 6"	751710-A	
	8" X 8"	751711-A	
	Ground Rod Driver - For driving electrical ground rods into the earth		
	1" X 15"	751102-A	
	Asphalt Cutter - For cutting through asphalt		
	5" X 17"	751620-A	
	KeenKut Chisel - Similar to flat chisel but with thicker blade for longer life		
	1-3/8" X 20"	751222-A	
	Digging Chisel - For digging in confined areas, channeling and more		
	3" X 22-1/2"	751621-A	
	Frost Wedge - For digging and breaking up frozen ground		
	1-3/4" X 24-1/2"	751223-A	
	Spike / Pin Driver - For driving spikes and pins such as guide anchors, tent stakes		
	1-3/4" X 18"	751101-A	
	2-1/2" X 5-1/2"	751106-A	
	(Use with Tampers Shank 751103-A)		

42 lbs 1-1/8" Hex Demolition Hammers

Double Insulation

Variable Speed

Constant Speed

Soft Start

28.6mm Hex Shank (HM1317CB/ HM1307CB)

Carrying Case

Bit Type

Blows Per Minute

Impact Energy

AMPS (120V)

Overall Length

1-1/8" Hex

730 - 1,450 BPM

33.8 J (24.9 ft. lbs)

14.0 A

32-1/2" (824 mm)

HM1317CB with AVT

HM1307CB



Standard Equipment: 1-1/8" Hex Shank Bull Point (751420-A), Plastic Carrying Case (824897-1)

When QUALITY & SERVICE COUNTS – Choose Makita
makita.ca

Satisfy Professional's Needs

42 lbs 1-1/8" Hex Demolition Hammers

HM1317CB/ HM1307CB  1-1/8" Hex Shank

Photo: HM1317CB

AVT & SOFT
ANTI VIBRATION TECHNOLOGY
NO LOAD

HM1317CB only