


- LG42-TBOBG Finish(BG) ☐ LG42-TBOK Finish(K) ☐
 LG42-TBOC Finish(C) ☐ LG42-TBOSDB Finish(SDB) ☐
 LG42-TBOD Finish(D) ☐ LG42-TBOY Finish(Y) ☐

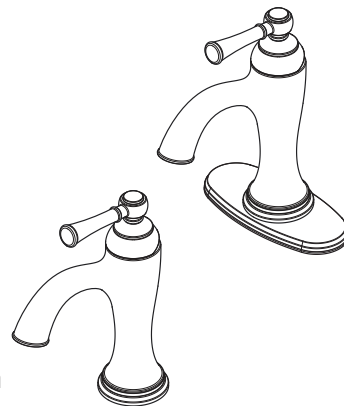

- 1 or 3-Hole Installation
- All Metal Construction
- Pforever Seal

Specifications

Features

- 1.2 GPM Flow Rate
- All Metal Construction
- 1 or 3-Hole Installation
- Optional Deckplate, Order 961-223*
- Metal Pop-Up Rod
- Pforever Seal™ Ceramic Disc Valve
- Limited Lifetime Warranty


Code Compliance

Pfister products are designed and manufactured in compliance with the following standards and codes:

- IAPMO Certified to ASME A112.18.1/CSA B125.1
- EPA WaterSense Certified
- NSF/ANSI/CAN61:Q≤1
- CEC Certified/CALGreen compliant
- ADA Compliant - ANSI A117.1 (Lever Handle Only)




Dimensions

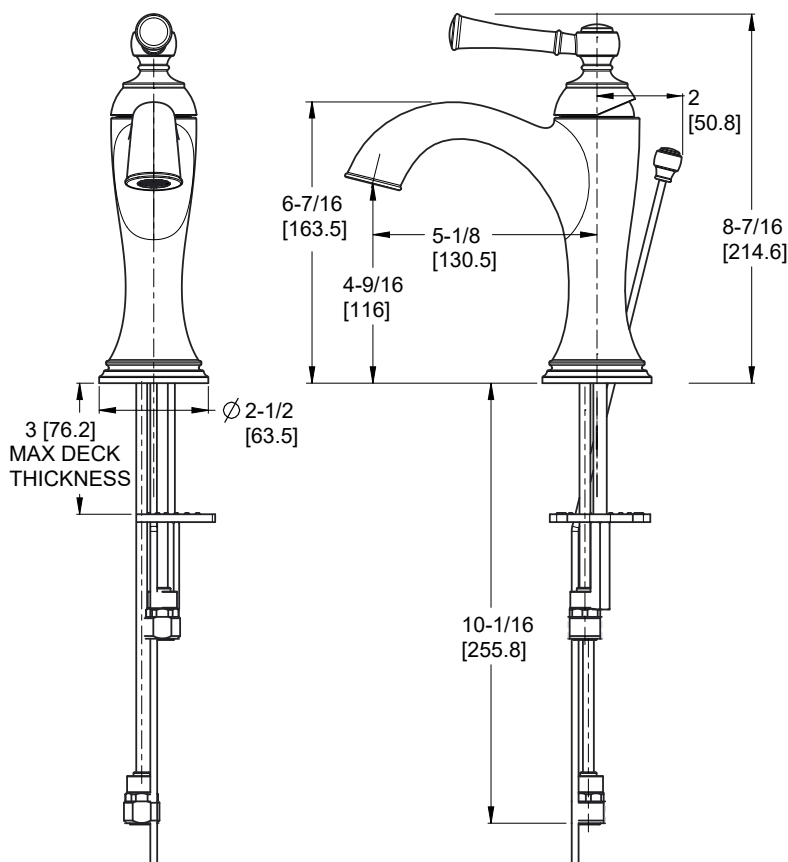

Ø1 Min to Ø1-1/2 Max. Deck Hole Openings

Optional Deckplate

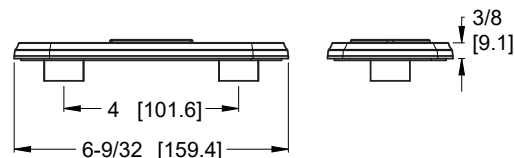

Metal Pop-Up

