


Pipe Jacks

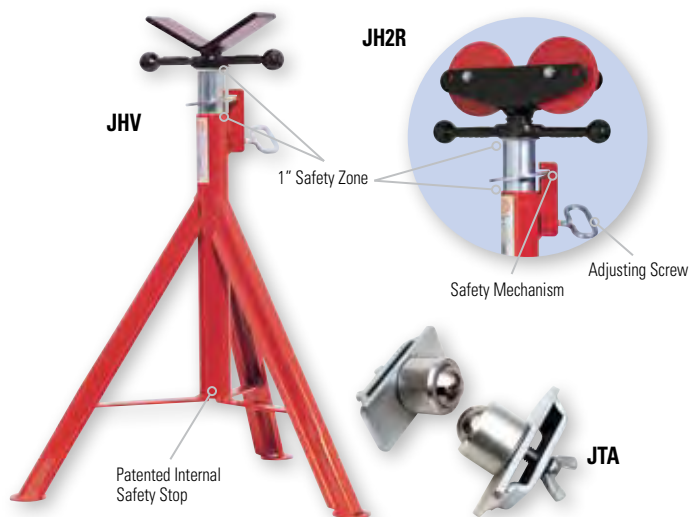

Convenient adjusting screw and a hardened steel locking ring are two features that make these 2,000 lb (909 kg) capacity **JHV** high jacks last for many years of use. Patented internal safety stop creates a 1" safety zone and prevents injuries to hands and fingers. Roller head jack (**JH2R**) has extra wide bearing for greater strength (2,000 lb capacity) and tool life. Adjusting screw gives proper working height. Outer surfaces are powder painted or zinc phosphate plated to resist corrosion. The 1,000 lb (454 kg) capacity ball transfer attachment (**JTA**) with replaceable ball casters bolts to either side of V-head. Ball transfer head attaches to Ridgid® brand and Sumner® models while all Reed heads (JTA, JH2R) and bases interchange with Sumner® and Greenlee®. All heads fit both high jacks and low jacks.

| Catalog No. | Item Code | Description | Height Adj. | | Pipe Capacity | | Weight | |
|-------------|-----------|--------------------------------------|-------------|----------|----------------------------------|--------|--------|------|
| | | | in | mm | in | mm | lbs | kg |
| JHV* | 06350 | V-Head High Jack | 24-47 | 610-1190 | 24 | 610 | 22.8 | 10.4 |
| JTA | 06351 | Ball Transfer Head Attachment (pair) | — | — | ³ / ₈ - 12 | 10-300 | 4.6 | 2.1 |
| JH2R* | 06352 | Roller Head High Jack | 24-47 | 610-1190 | 24 | 610 | 25.0 | 11.4 |

*6 or more pieces in any combination must ship by truck freight.



Chain Vises

Chain Vises permit the holding of irregular shapes and provide an excellent cost-for-capacity value. Reed chain vises are the fastest to use: two turns to open or close. These vises are the strongest available and hardened tool steel jaws are triple-faced for rotations instead of replacements, providing two free sets of jaws.

| Catalog No. | Item Code | Pipe Capacity | | Weight | |
|-------------|-----------|-------------------------------------|-------------|--------|------|
| | | Inches-Nom. | Actual Ø mm | lbs | kg |
| CV2 | 02510 | ¹ / ₈ - 2 1/2 | 10 - 75 | 9.3 | 4.5 |
| CV4 | 02520 | ¹ / ₈ - 4 | 10 - 114 | 14.6 | 6.8 |
| CV5 | 02530 | ¹ / ₈ - 5 | 10 - 141 | 15.5 | 6.8 |
| CV6 | 02540 | ¹ / ₄ - 6 | 14 - 168 | 28.4 | 13.0 |
| CV8 | 02550 | ¹ / ₂ - 8 | 21 - 219 | 46.3 | 22.0 |
| CV12* | 02560 | ³ / ₄ - 12 | 25 - 335 | 111.0 | 55.0 |

*EXCLUSIVE

✓ WHY REED?

Reed chain vises save money because they come standard with three-sided jaws. Only Reed has a 12" capacity chain vise – excellent cost for capacity value.

Field Pipe Vise

Field Pipe Vise holds pipe up to 20" (500 mm) diameter. More pipe capacity than other Reed vises and 2,000 lb (909 kg) vise capacity yet weighs only 22 lbs (10 kg) without legs and backbone. Super choice for pre-trench work and above ground cuts. Excellent flexibility achieved in height and length of vise appropriate to application as customer may cut own pipe for legs and backbone.

| Catalog No. | Item Code | Pipe Capacity | | Weight | |
|-------------|-----------|---------------|-------------|--------|-----|
| | | Inches-Nom. | Actual Ø mm | lbs | kg |
| FPV20* | 06027 | 2 - 20 | 50 - 500 | 20.6 | 9.4 |

ACCESSORY

| Catalog No. | Item Code | Description | Weight | |
|-------------|-----------|-------------------|--------|------|
| | | | lbs | kg |
| FPVBLLS | 96014 | Legs and Backbone | 50.0 | 22.7 |

*To create legs and backbone, use 1 1/2" diameter Sch. 40 steel pipe.

