
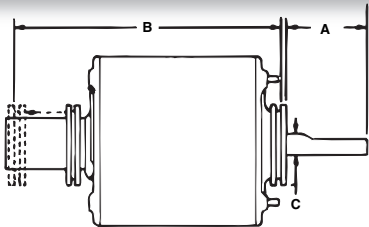


Belted Fan & Blower Motors - Split Phase

5 1/2 inch dia. MARS SERIES 043

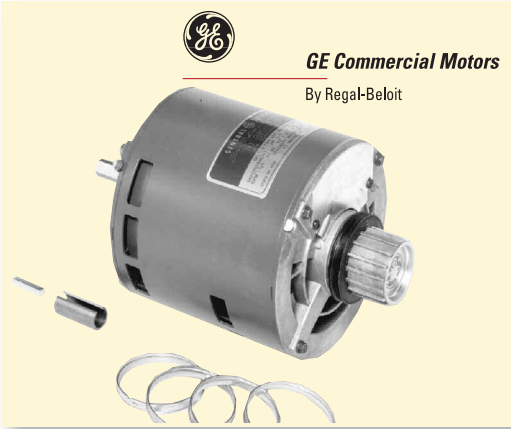

“PDQ” Belted Fan And Blower Motors

GE “PDQ” motors are designed to replace 48 and 56 frame belt driven furnace blower motors by using the old base. The patented design of the end shield allows the resilient ring to be positioned along the extended hub to match the dimensions of the old base. 2.50 inch resilient rings are provided, but split rings can be removed to reduce diameter to 2.25 inch. All motors feature reversible rotation and 1725 RPM.

Features:

- Length adjusts to fit old base
- Permanently lubricated ball bearings
- 1/2 inch shaft with flat, 5/8 inch adapter with key included
- EXTRA long life centrifugal starting switch
- Open construction


Specifications:

- Single phase, 60 Hertz
- Overload protected
- Time rating, continuous, 40°C ambient
- Moderate starting torque


1725 RPM – Reversible Rotation - Ball Bearing - 4 Pole

MARS NO.	GE NO. 5KH3	MARATHON NO.	HP	VOLTS	FLA	SF	DIMENSIONS			NEMA FRAME
							A	B	C	
04730	5KH39QNC003T	4730	1/4	115	5.0	1.35	1.5	6.67/7.91	1/2	48/56
04733	9DNA533T	4733	1/4	115	5.1	1.35	1.5	7.12/8.11	1/2	48/56
04731	5KH39QNC004X	4731	1/3	115	5.8	1.35	1.5	6.87/8.16	1/2	48/56
04738	9QN9703T	4738	1/3	230	3.1	1.35	1.5	6.87/8.16	1/2	48/56
04732	D5KH39QNC000T	4732	1/2	115	7.9	1.25	1.5	7.12/8.11	1/2	48/56
04734	2HNA532T	4734	1/3	115	6.6	1.35	1.5	7.12/8.11	1/2	48/56
04739	9QN9704T	4739	1/2	230	4.0	1.25	1.5	7.12/8.11	1/2	48/56

Bases for “PDQ” motors - order separately MARS# 08062 See Page M-73

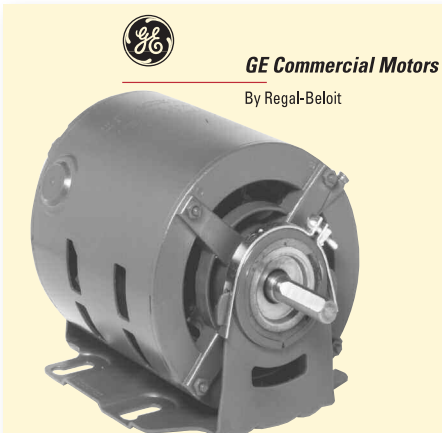

Economy Model Belted Fan And Blower Motors



Features:

- All angle sleeve or ball bearings
- Resilient base mounted
- Slotted holes in base match 48 or 56 frame bolt patterns
- 1/2 inch shaft diameter - 5/8 inch adapter with key included

Specifications:

- Single phase, 60 Hertz
- Overload protection
- Open construction
- Continuous duty, 40°C ambient

1725 RPM - Reversible Rotation - 4 Pole

MARS NO.	GE NO. 5KH3	MARATHON NO.	HP	VOLTS	FLA	SF	DIMENSIONS				NEMA FRAME
							A	B	C	D	
04701	9QN5771T	4701	1/4	115	5.1	1.35	1.50	6.65	3.0	1/2	48/56
04706	9QN5772T	4706	1/3	115	6.6	1.35	1.50	6.61	3.0	1/2	48/56
04708	9QN5773T	4708	1/2	115	7.9	1.25	1.50	6.91	3.0	1/2	48/56
04338 ⁽¹⁾	9QN9541T	4338	3/4	115	11.4	1.00	1.50	9.80	3.0	1/2	56

(1) Ball bearings Ⓢ Upon depletion of stock on this item, the referenced Marathon item will be substituted.