


A Moen Incorporated Brand

Baystone[™] B NSF @ UPC®

Model: 42519 series



One Handle Pulldown Kitchen

DESCRIPTION

- · Metal construction with various finishes identified by suffix
- · Flexible supplies with 3/8" compression fittings
- · Mounts in single hole or 3 hole installation
- · Three (3) individual boxes per master carton

OPERATION

- · Pivot action, lever style handle
- Temperature control by 90° arc of handle travel
- · Pulldown spray wand with 68" braided hose
- Operates in stream or spray mode in the pullout or retracted position by rotating spray face
- · Will operate with less than 5 lbs. of torque

FLOW

Flow is limited to 2.2 gpm max (8.3 L/min) at 60 psi

CARTRIDGE

- · Ceramic disc technology
- · Non-metallic, non-ferrous, and brass materials
- · Single body construction for easy replacement

STANDARDS


- Third party certified to CSA B-125.1, ASME A112.18.1, and all applicable requirements referenced therein including NSF 61/9
- Complies with California Proposition 65 and with the Federal Safe Drinking Water Act
- ADA for lever handle

WARRANTY - RESIDENTIAL, COMMERCIAL

- Ten year limited warranty against defects in materials and manufacturing workmanship
- Refer to the installation instructions enclosed with each CFG product or call 1-888-450-4910 for complete warranty information

NOTE:

 This faucet is designed to be installed through 1 or 3 holes 1-1/2" (38mm) minimum diameter

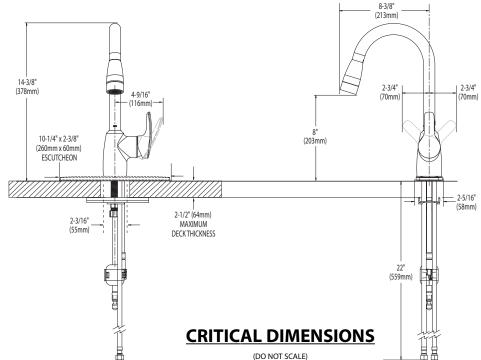

CLEVELAND FAUCET GROUP · 25300 AL MOEN DRIVE · NORTH OLMSTED, OHIO 44070 · (888) 450-5522 · www.cfgonline.com