



**Submitted Model No.:** 

# **Specific Features:**

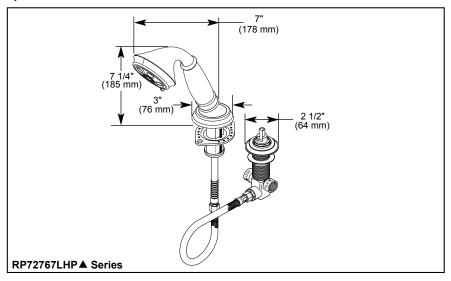

**Available LHP Handle Options** 

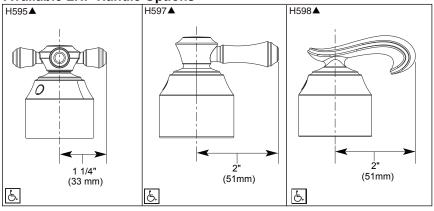

▲ Designate proper finish suffix



see what Delta can do

# **ROMAN TUB HAND** HELD SHOWER

- Roman Tub Deck Mount Hand Held Shower
- Ledge or Wall Mount Transfer Valve

### **STANDARD SPECIFICATIONS:**

- Solid fabricated brass body
- Ledge or wall mount transfer valve for maximum 1 11/16" (43 mm) deck thickness
- 69" (1753 mm) flexible hose
- LHP-Less handle program. See handle options below.
- Control mechanism is a rotating cylinder type withstainless steel plate and 180° rotation, with replaceable non-metallic seats operating in stainless steel lined sockets.
- All operating parts shall be replaceable from the top
- 1/2"-14 NPSM threaded female inlets and outlets
- Do not install hot and cold inlet water supplies directly to transfer valve. Must be installed to another valve in order to control volume and temperature.
- Handshower includes double check valves for backflow prevention
- Maximum 1.75 gpm @ 80 psi, 6.6 L/min @ 550 kPa

#### **WARRANTY**

- Lifetime limited warranty on parts (other than electronic parts and batteries) and finishes: or, for commercial users, for 5 years from date of purchase.
- 5 year limited warranty on electronic parts (other than batteries); or, for commercial users, for 1 year from the date of purchase. No warranty is provided on batteries.



## **COMPLIES WITH:**

• ASME A112.18.1 / CSA B125.1 Indicates compliance to ICC/ANSI A117.1

■ EPA WaterSense® - Applies to handshower only - 59433\*