

## Carbide-Tipped Saw Blades




Exclusive dual-beveled tooth face has two 10° angles



High grade C-3, fine-grain Tungsten carbide tips for longer durability



"M" shaped tooth has two cutting points to provide the speed of a 24 tooth with the finish of a 48 tooth

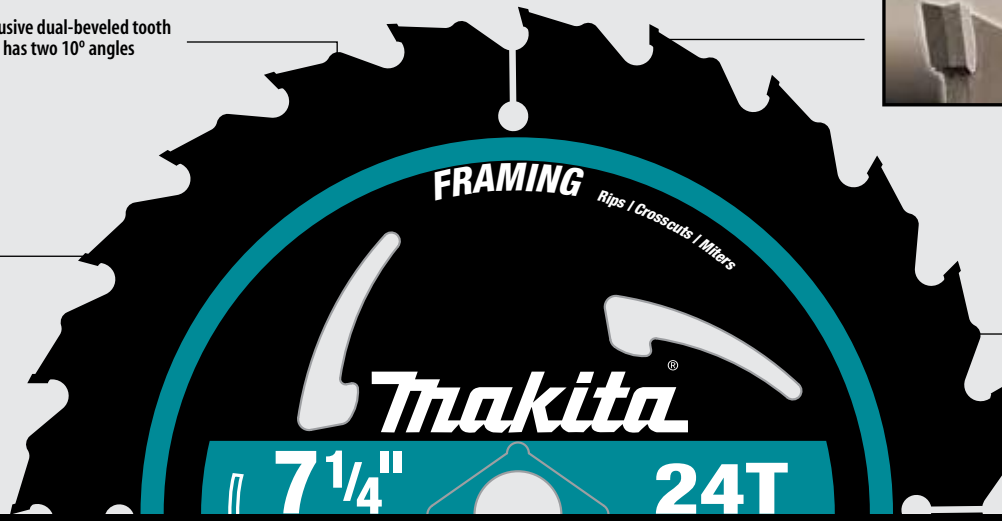


**ULTRA-COATED**

Ultra-Coated blades provide reduced pitch build-up



General Contractor



Framing



Framing

Diameter	Blade Type	No. Teeth	Arbor	Grind	Hook	Plate	Kerf	Max. Speed	Model	Part #
3-3/8"	General Purpose	20T	15mm	ATB	20°	.028"	.039"	2,240	SH01W	A-95021
3-3/8"	General Purpose	24T	15mm	ATB	24°	.039"	.078"	2,240	SH01W	721005-A
4-3/8"	General Purpose	12T	20mm	ATB	22°	.049"	.073"	13,890	4200NH	A-90093
4-3/8"	General Purpose	24T	20mm	ATB	10°	.055"	.078"	13,890		721107-6A
5-3/8"	General Purpose	16T	5/8"	ATAF	20°	.039"	.059"	4,500	XSS03	A-94904
5-1/2"	General Purpose	18T	5/8"	ATB	20°	.055"	.078"	10,900	5005BA	792335-0
6-1/2"	Crosscutting	48T	20mm	ATB	8°	.062"	.087"	9,250	SP6000K/K1	B-07353
6-1/2"	General Purpose	24T	5/8"	ATB	20°	.039"	.059"	4,770		A-85092
6-1/2"	General Purpose	40T	5/8"	ATB	18°	.039"	.063"	4,770	XSH03, XSS01	A-90314
7-1/4"	General Contractor	16T	5/8"	ATB	25°	.049"	.073"	8,300		A-90009-B-10 (10/pk)
7-1/4"	General Contractor	24T	5/8"	ATB	15°	.047"	.071"	8,300	5007F, 5007FA, 5007MG, 5007MGA, 5377MG, HS7600, 5477NB, XSH01	D-45989-10 (10/pk)
7-1/4"	Framing	24T	5/8"	"M"	15°	.047"	.071"	8,300		A-94839-10 (10/pk)
7-1/4"	Ultra-Coated Framing	24T	5/8"	"M"	15°	.047"	.071"	8,300		A-94530-10 (10/pk)
7-1/4"	Fine Crosscutting	40T	5/8"	ATB	20°	.049"	.073"	8,500		721251-A
8-1/4"	Framing	24T	5/8"	ATB	20°	.051"	.078"	5,700	5008MGA	D-21521
8-1/4"	Fine Crosscutting	40T	5/8"	ATB	20°	.055"	.079"	5,700		792377-A
10-1/4"	Framing	24T	5/8"	ATB	20°	.063"	.091"	5,870	5104	A-94910
16-5/16"	Beam & Timber	32T	1"	ATB	20°	.07"	.109"	3,500	5402NA	A-90956
16-5/16"	Beam & Timber	60T	1"	ATB	20°	.078"	.109"	3,500		792118-8

◀ Indicates cordless models

## NEW FMF Special Edition Steel Saw Blade – Official Power Tool of the Mexican National Team (FMF™)

Diameter	Blade Type	No. Teeth	Arbor	Grind	Hook	Plate	Kerf	Max. Speed	Model	Part #
7-1/4"	FMF Framing	24T	5/8"	"M"	15°	.047"	.071"	8,300	5007F, 5007FA, 5007MG, 5007MGA, 5377MG, HS7600, 5477NB, XSH01	A-95928-10 (10/pk)

The FMF™ is composed of the best soccer players around the world. They continue to be one of the top teams on the world pitch. [More Details See pg. 61](#)

## Steel Saw Blades

Diameter	Blade Type	No. Teeth	Arbor	Grind	Hook	Plate	Kerf	Max. Speed	Model	Part #
3-3/8"	General Purpose	50T	15mm	—	—	.031"	.046"	2,240	SH01W	721003-8
3-3/8"	Thin Materials	50T	15mm	—	—	.015"	.031"	2,240	SH01W	792299-8
16-5/16"	General Purpose	50T	1"	Chisel	20°	.062"	.093"	2,760	5402NA	792116-2