

Style That Works Better

# CADET® 3 ELONGATED 10" ROUGH-IN TOILET

VITREOUS CHINA

### **CADET® 3 ELONGATED 10" ROUGH-IN TOILET**

#### **2383.010**

- Vitreous china
- Low-consumption (6.0 Lpf/1.6 gpf)
- EverClean® surface inhibits the growth of stain- and odor-causing bacteria, mold, and mildew on the surface
- Features the Cadet® 3 Flushing System
- Elongated siphon action jetted bowl
- Fully-glazed 2-1/8" trapway with 2" ball pass
- Generous 9" x 8" water surface area
- Close-coupled tank with flat tank cover for superior storage
- Oversized 3" flush valve with chemical resistant flapper
- Chrome trip lever
- Speed Connect® tank-to-bowl coupling system
- Sanitary dam on bowl with four point tank stabilization
- 2 color-matched bolt caps
- 100% factory flush tested
- 5 year warranty

Ш	J 3014.016 Eld	ngated	Bowl	
	3014.001 Eld	ngated	Universal	Bow
	<b>4019.016</b> Tar			

# **Nominal Dimensions:**

724 x 432 x 737mm (28-1/2" x 17" x 29")

Fixture only, seat and supply by others

## **Alternative Tank Configurations Available:**

- ☐ 4019.600 Tank complete with tank cover locking device
- 4019.800 Tank complete with trip lever on right side
- 4019.900 Tank complete with tank cover locking device and trip lever on right side

# Compliance Certifications -


### **Meets or Exceeds the Following Specifications:**

 ASME A112.19.2-2008/CSA B45.1-08 for Vitreous China Fixtures

## To Be Specified:

- ☐ Color: ☐ White ☐ Bone ☐ Linen ☐ Black
- □ Seat: #5325.010 Elongated Champion® Slow Close solid plastic seat and cover with easy lift off feature
- ☐ Seat: #5284.016 Elongated EverClean® solid plastic seat and cover
- ☐ Seat: #5321.110 EverClean® Elongated Seat with Slow Close Snap-Off Hinges
- ☐ Supply with stop:



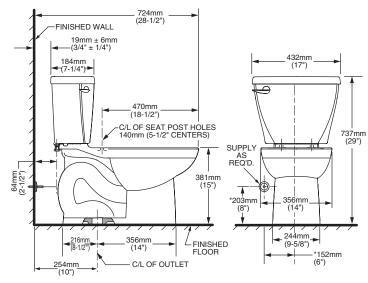

#### NOTES

THIS TOILET IS DESIGNED TO ROUGH-IN AT A MINIMUM DIMENSION OF 254MM (10") FROM FINISHED WALL TO C/L OF OUTLET. SUPPLY NOT INCLUDED WITH FIXTURE AND MUST BE ORDERED SEPARATELY

\* DIMENSION SHOWN FOR LOCATION OF SUPPLY IS SUGGESTED.

**IMPORTANT:** Dimensions of fixtures are nominal and may vary within the range of tolerances established by ANSI Standard A112.19.2. These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.

CADET® 3