




GE Definite Purpose Contactors

MARS SERIES **130**

COMPONENT

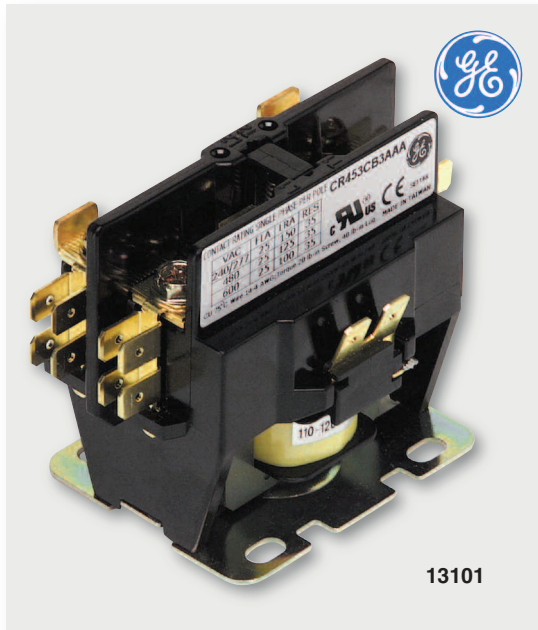

Model 453 Definite Purpose Contactors

These compact models for 1-1/2, and 2 pole applications, and new 3 pole models that have been specially designed to accommodate IEC style auxiliaries and overloads.

The compact models feature universal mount bases, taped coils, and combination phillips/ slot head screws. 40 amp compact models feature box lugs and arc covers. All of the GE compact designs feature "no burn" coil design. These are self-protecting coils that meet the Trane specification. The Series 453 GE compact design contactors all meet ARI 780. Some other manufacturer's economy model compact contactors do not meet this rigorous spec. All of this is now available at attractive pricing!

Features:

- Compact overall size
- Combo phillips/slothead screws/hexhead on 30 amp
- Box lugs on 40 F.L.A. rated models
- Universal mount base

Specifications:

CR453C Compact, 30A, 40A, 1-Pole Plus Shunted Pole & 2-Pole

FULL LOAD AMPS	RESISTIVE AMPS PER POLE	LOCKED ROTOR AMPS SINGLE PHASE, 50/60 HZ			POLES
		240/277V	480V	600V	
30	40	180	150	120	1 + Shunt
					2
40	50	240	200	160	2*

* Ratings shown are for 1-phase, 2-pole.

MARS NO.	F.L.A.	RESISTIVE RATING PER POLE	POLES	VOLTAGE	GE MODEL	DIMENSIONS		
						HEIGHT	WIDTH	DEPTH
13101	30	40	1-1/2	24	453CC3HAAAM	2-9/16	2	3-1/4
13104	30	40	2	24	453CC2HAAAM	2-3/4	2	2-7/16
13105				120	453CC2AAAAM			
13106				240	453CC2BAAAM			
13107	40	50	2	24	453CE2HBBAM	2-3/4	2	2-7/16
13108				120	453CE2ABBAM			
13109				240	453CE2BBBAM			