American Standard

HERITAGE/AMARILIS

TWO-HANDLE BOTTOM-MOUNT KITCHEN FAUCET WITH TUBULAR BRASS SWIVEL SPOUT




7271.000 Shown

MODEL NUMBER:

7271.000 Bottom-Mount Kitchen Faucet
 Tubular brass swivel spout. Color-matched side spray.
 Less handles.

7270.000 Bottom-Mount Kitchen FaucetTubular brass swivel spout. Less spray. Less handles.

Handles must be ordered separately.

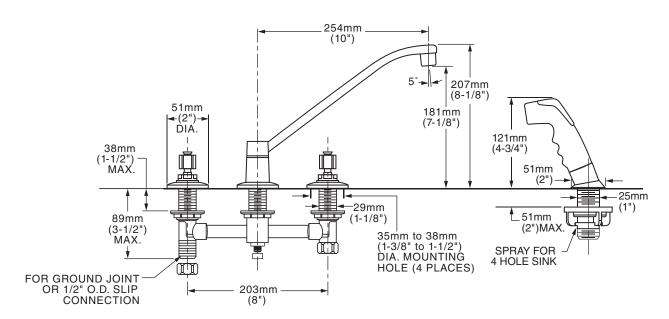

GENERAL DESCRIPTION:

Durable brass construction. Amarilis 1/4 turn washerless ceramic disc valve cartridges. One-half inch male inlet shanks with brass coupling nuts. 10" (254mm) long tubular brass swivel spout. 2.2gpm/8.3L/min. maximum flow rate.

PRODUCT FEATURES:

Ceramic Disc Valve Cartridges: Assures a lifetime of drip-free performance.

Brass Construction: Durable - Excellent in high use applications. Ideal for prolonged contact with water.

Handle Choices: Available with lever or wrist blade handles.

Lead Free: Faucet contains ≤ 0.25% total lead content by weighted average.

SUGGESTED SPECIFICATION:

Two handle bottom-mount kitchen faucet shall feature brass construction with all brass coupling nuts. Shall also feature 1/4 turn washerless ceramic disc valve cartridges.

Faucet shall be American Standard Model # _____. and handle kit # 0000. ___. __.

© 2013 AS America Inc. Revised 12/13

L143




HERITAGE/AMARILIS

TWO-HANDLE BOTTOM-MOUNT KITCHEN FAUCET WITH TUBULAR BRASS SWIVEL SPOUT

CODES AND STANDARDS

These products meet or exceed the following codes and standards:

ASME A112.18.1 CSA B 125 NSF 61/Section 9 NSF 372



		Finish
Product		Polished Chrome
Number	Description	002
7271.000	Kitchen Faucet with Color-matched side spray. Less handles.	
7270.000	Kitchen Faucet. Less hand spray. Less handles.	

Handles must be ordered separately.

To order Less Handles - Specify: 4 digit Style number followed by three zeros and 3 digit finish number.

Example 7271.000.002 = Kitchen faucet with hand spray in Polished Chrome finish.

The above fittings will accept the following Amarilis-Series handles.

≈¶	4
Wrist Blade	Lever
372H	342H
372V	342V
Ė	Ė

MEETS THE AMERICANS WITH DISABILITIES ACT GUIDELINES AND ANSI A117.1 REQUIREMENTS FOR ACCESSIBLE AND USABLE BUILDING FACILITIES-CHECK LOCAL CODES

Other Aerators Available:			
Part Suffix	Description		
LV15	1.5 gpm (5.7 Lpm) Vandal-Resistant PCA Non-Aerated Laminar Flow Outlet		
L15	1.5 gpm (5.7 Lpm) PCA Non-Aerated Laminar Flow Outlet		
V15	1.5 gpm (5.7 Lpm) Vandal-Resistant PCA Aerator		
LV10	1.0 gpm (3.8 Lpm) Vandal-Resistant PCA Non-Aerated Laminar Flow Outlet		
L10	1.0 gpm (3.8 Lpm) PCA Non-Aerated Laminar Flow Outlet		
V10	1.0 gpm (3.8 Lpm) Vandal-Resistant PCA Aerator		
V05	0.5 gpm (1.9 Lpm) Vandal-Resistant PCA Non-Aerated Spray		
V035	0.35 gpm (1.3 Lpm) Vandal-Resistant PCA Non-Aerated Spray		

*PCA - Pressure Compensating

All modifications meet CALGreen Code

— L144 — Revised 12/13 AS America Inc.