



## Design features:


- Rugged one-piece molded fiberglass construction.
- Removable aluminum front threshold simplifies washer or water heater placement.
- Side outlet solvent weld 1" DWV 90° elbow fitting (furnished), mounts to side curb for connection to a remote drain using 1" PVC piping (not included).
- Remains stationary, can be easily secured to floor (hardware included).
- Easy to install and clean.
- Mildew-resistant, colorfast semi-gloss white finish.

## Code Accepted

Fiberglass DURAPAN water heater pans meet or exceed performance requirements:

- American Society of Testing and Materials (ASTM)— D 635, E 84 and E 162
- IAPMO-IGC 200-2004
- Complies to applicable sections of ANSI Z124.1.2

## Installing Side Outlet Fitting

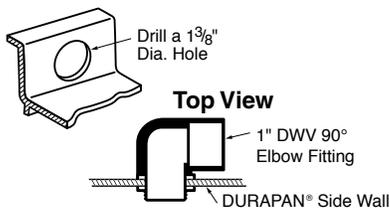

Drill hole through any side or back wall. Install solvent weld elbow fitting and connect 1" PVC pipe (not provided) leading to DWV drain.

## Specifications:

Model No.	Drain Location	Overall	Inside	UPC
98	Side drill hole	30"L x 32"W x 2-1/2"H	28"Lx29"W	6 71031 00299 0

**General:** Furnish and install as shown on plans, DURAPAN™ Washer and Water Heater Pan Model 98, as manufactured by E.L. Mustee & Sons, Inc. One-piece compression molded fiberglass, using matched metal molds under extreme heat and pressure. Shoulder will be no less than 2-1/2" high. Removable aluminum threshold with water tight seal secured by stainless steel screws. May be secured to sub-floor, mounting hardware provided. Shall include (1) 1" NPSM-90° elbow fitting. Shall meet IAPMO-IGC 200-2004. Color: White.

